

Outline:

- High saturation current to storage higher energy, capable of carrying higher peak transient current.
- Inductance value and DC bias capability are less affected by temperature and have high stability.
- Compact structure, high power density, can be operated in high current applications continuously.
- Flat wire winding, low DC resistance, good heat dissipation performance and low temperature rise.

Features:


- Environmental: RoHS, Reach compliant, Halogen free.
- Weight: 260.5g~276.2g
- Moisture Sensitivity: Level (MSL) 1
(Unlimited floor life at 5 ~ 40°C, RH ≤ 70% relative humidity)
- Operating temperature: -55°C ~ +155°C
(Including Self-heating).
- Storage temperature: -55°C ~ +155°C

Application:

- Ideally used in new energy system, industrial control.
- High current power supplies, Battery power devices.
- DC/DC converters in distributed power systems.
- Communication equipment, artificial intelligence.



1 Product Dimensions (mm)

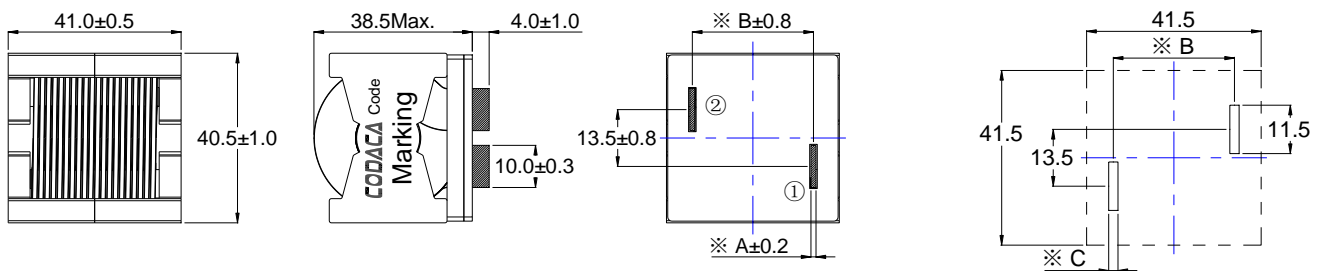


Inductance	7.50μH	12.0μH	15.0μH	22.0μH	27.0μH	42.0μH
A(mm)	2.00	1.60	1.40	1.20	1.00	0.80
B(mm)	28.5	28.5	28.8	28.5	29.0	29.0
C(mm)	3.00	2.60	2.40	2.20	2.00	1.80

※ Date code will be changed by manufacture date.

2 Electrical Characteristics

Part No.	Inductance (μH)※1 ±20%	D.C.R. (mΩ)		Isat	Irms
		Typical	Max.	(A)※2	(A)※3
				Typical	Typical
CPCFA4041CA-7R5M	7.50	0.85	1.00	123	90.0
CPCFA4041CA-120M	12.0	1.31	1.57	97.0	70.0
CPCFA4041CA-150M	15.0	1.56	1.88	82.0	56.0
CPCFA4041CA-220M	22.0	2.32	2.79	72.0	48.0
CPCFA4041CA-270M	27.0	3.18	3.82	64.0	43.0
CPCFA4041CA-420M	42.0	4.85	5.82	52.0	35.0



① Schematic


Reference Hole Pattern

All data is tested on 25°C ambient temperature







1. Inductance measure condition at 100kHz, 0.1V.
2. Isat: the actual value of DC current when the Inductance decrease 20% of its initial Value.
3. Irms: The actual value of DC current when the Temperature rise is ΔT40°C (Ta=25°C)

3 How to Order







CPCFA4041CA-7R5M









4 Saturation Current vs Temperature Rise Current Curve

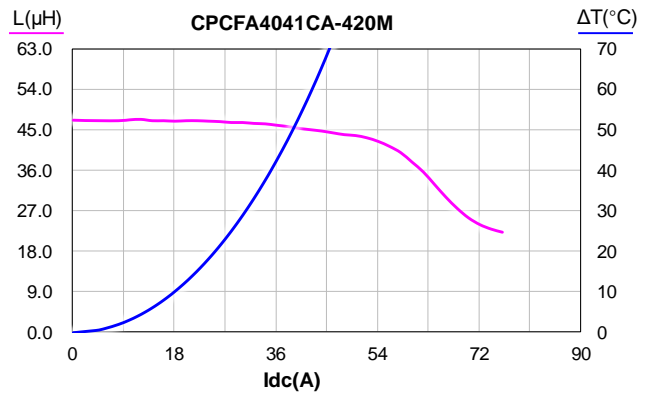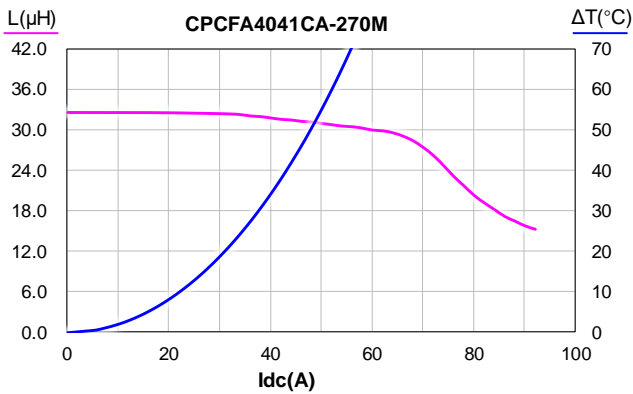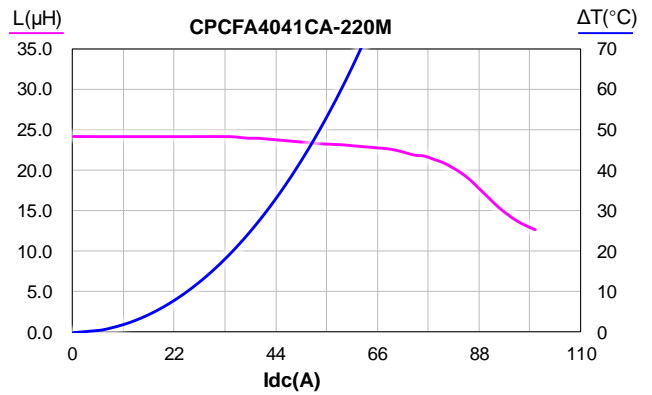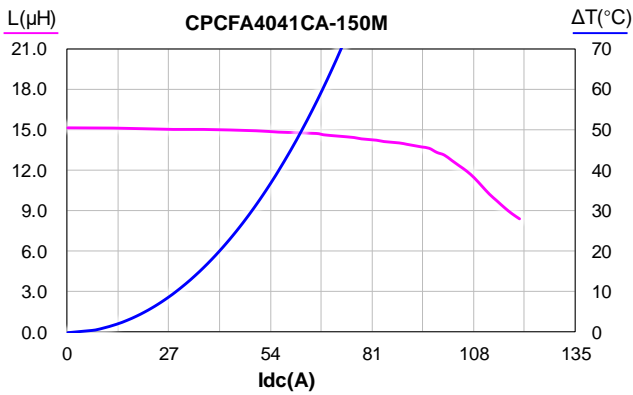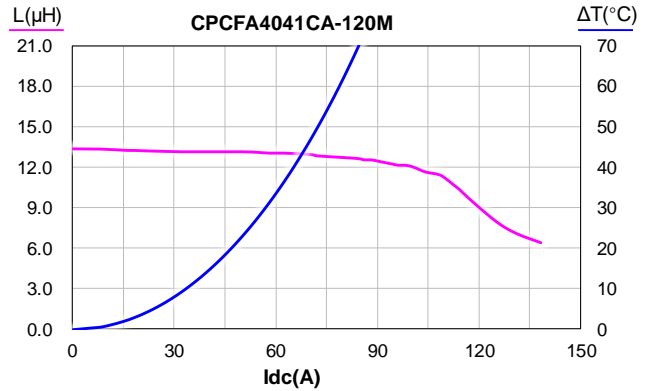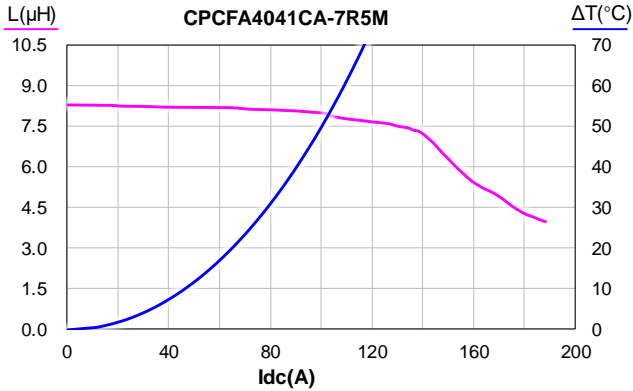

5 L vs Frequency Curve

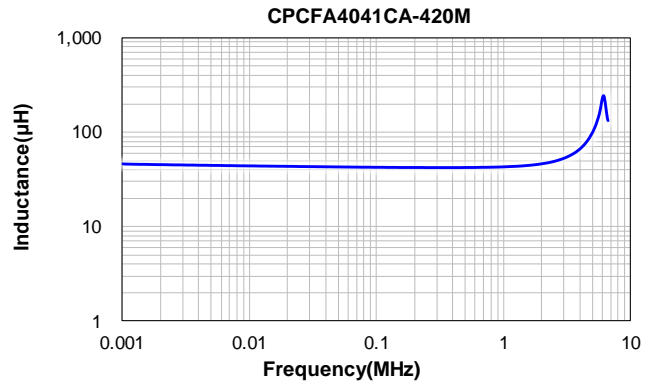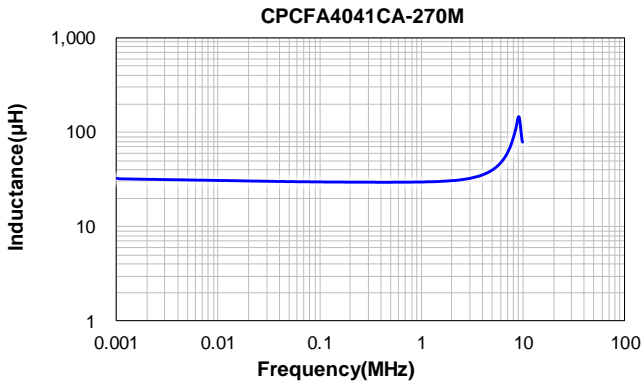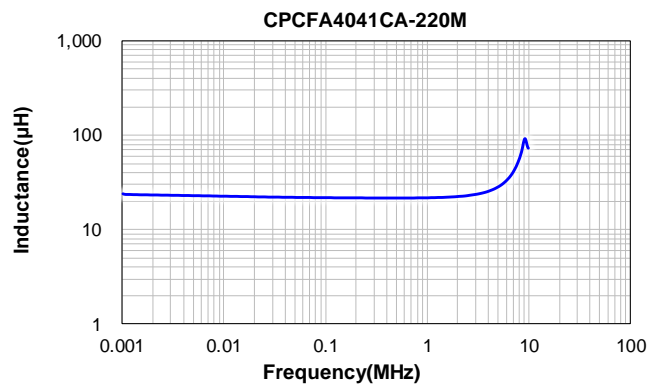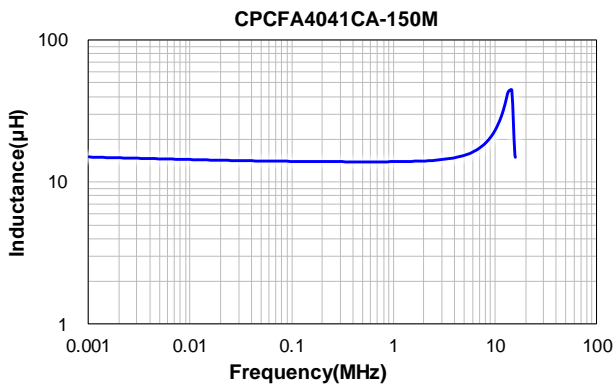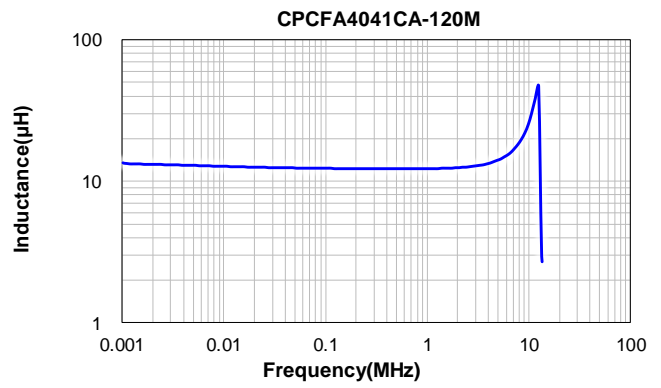
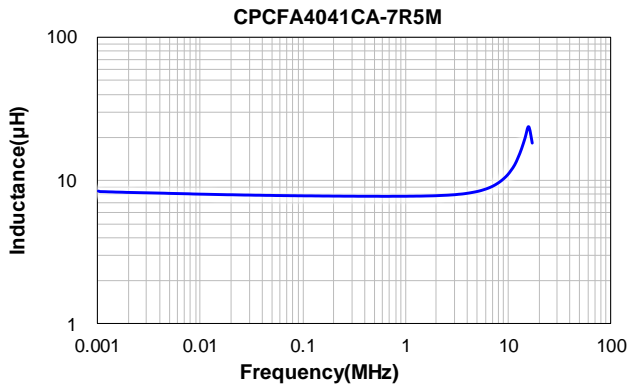


6 Impedance vs Frequency Curve

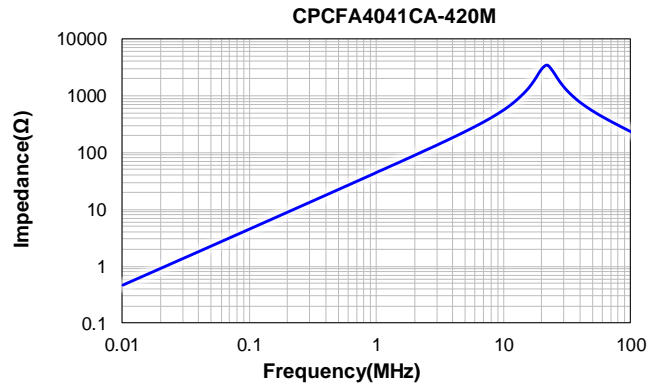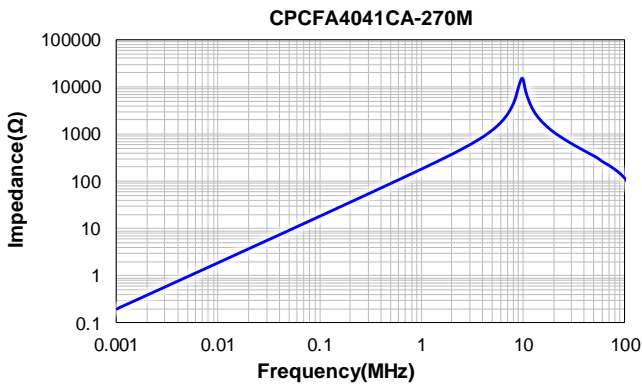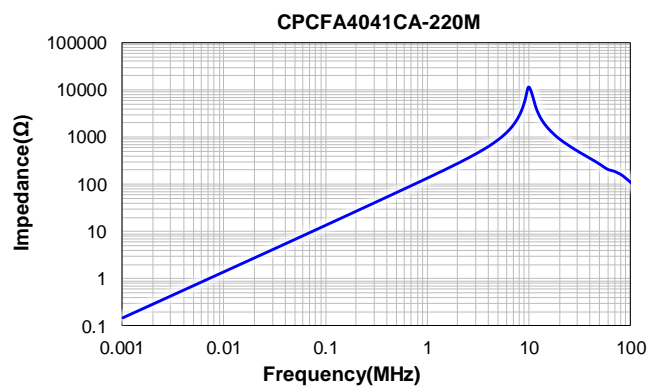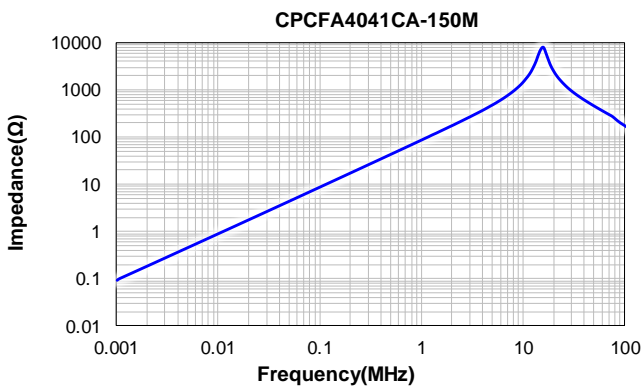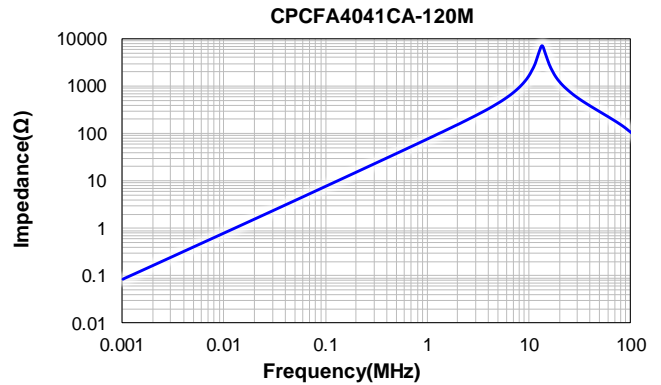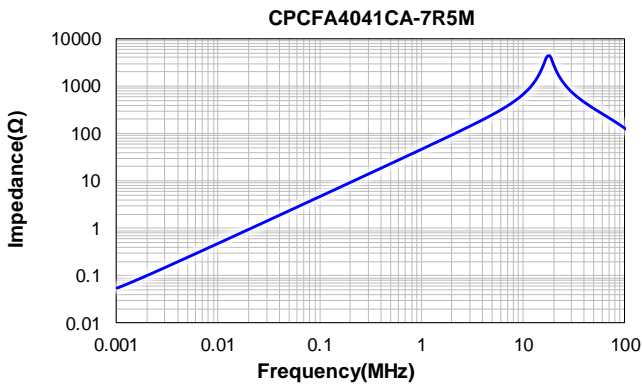

7 Packing Specification



7.1 Plastic cotton Dimensions (mm)

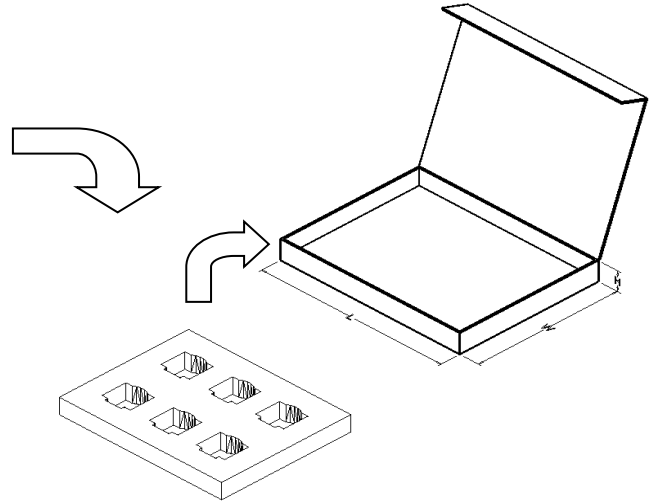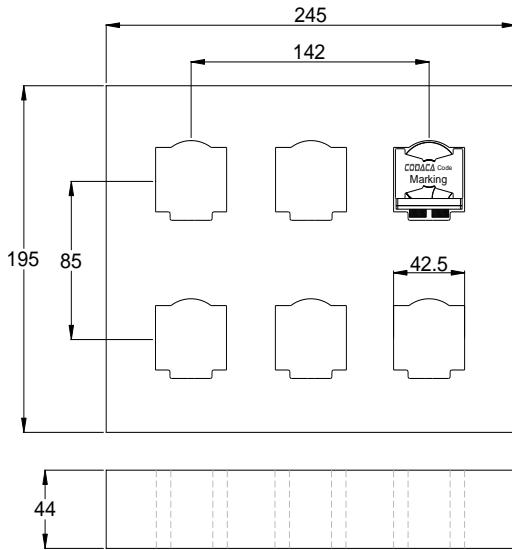

Packaging Unit (Pcs)	Material
6	EPE

L typ	W typ	H typ	No. of Tray (Pcs)	Packaging Unit(Pcs)	Material
265	205	50	1	6	Paper

7.2 Packing(mm)

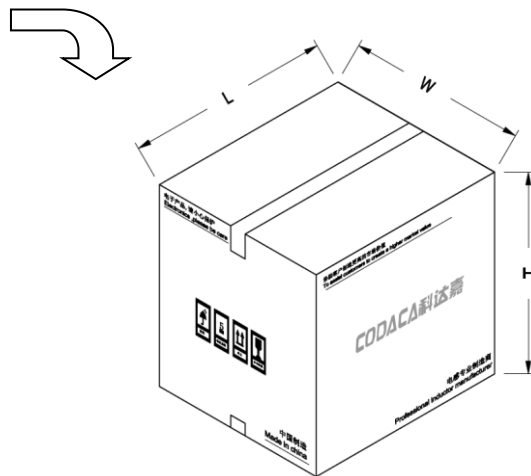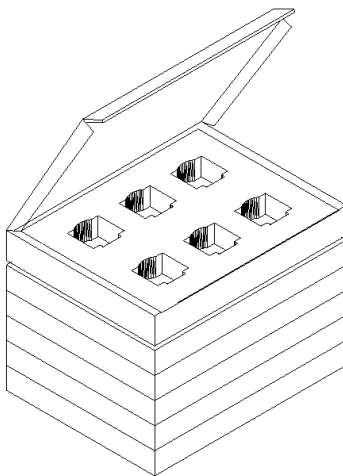

L typ	W typ	H typ	No. of Inner Carton	Packaging Unit(Pcs)	Material
275	232	261	4	24	Paper

8 Notice of Use

- 8.1 Special remind: Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.
- 8.2 Product in packing storage condition: temperature 5~40°C, RH≤70%.
If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminals (electrodes), affecting soldering status.
- 8.3 A storage of Codaca Electronic products for longer than 12 months is not recommended, Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- 8.4 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust or corrosion.
- 8.5 Always handle products with care.
- 8.6 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering.
Always ensure optimum conditions for soldering.
- 8.7 When this product will be used on a similar or new project to the original one, sometimes it might be unable to satisfy the specifications due to different condition of usage.
- 8.8 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., or use in abnormal conditions protective devices or protection circuit in the end product.
- 8.9 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.
- 8.10 If using in potting compound, the magnet wire coating might be damaged, please consult with us.
- 8.11 Refrain from rinsing product. If necessary, please consult with us.
- *8.12 Codaca Electronic products without "V" prefix are qualified for industrial product requirement , and with "V" prefix are qualified for AEC-Q200, but it doesn't mean that Codaca Electronic products can absolutely meet specific industry norms and quality test standards in automotive electronics or more strict application fields . Codaca Electronic will be exempted from being responsible for the consequences of using Codaca products in automotive electronic or higher application field related to safety when without being aware of it.