



Outline:

- High saturation current to storage higher energy, capable of carrying higher peak transient current.
- Inductance value and DC bias capability are less affected by temperature and have high stability.
- Compact structure, high power density, can be operated in high current applications continuously.
- Flat wire winding, low DC resistance, good heat dissipation performance and low temperature rise.
- Magnetic shielded structure reduces electromagnetic emissions and conducted interference, and improves electromagnetic compatibility (EMC).


Features:

- Environmental: RoHS compliant, halogen free.
- Weight: 22.3g.
- Moisture Sensitivity: Level (MSL) 1
(Unlimited floor life at <30°C / 85% relative humidity).
- Operating temperature range: -55°C~+155°C.
(Including coil's temperature rise).
- Storage temperature range: -55°C~+155°C.

Application:

- PV inverter/Industrial control/New energy.
- DC /DC converters/Motherboards/Filter.
- High current switching regulators.

1 Product Dimensions (mm)

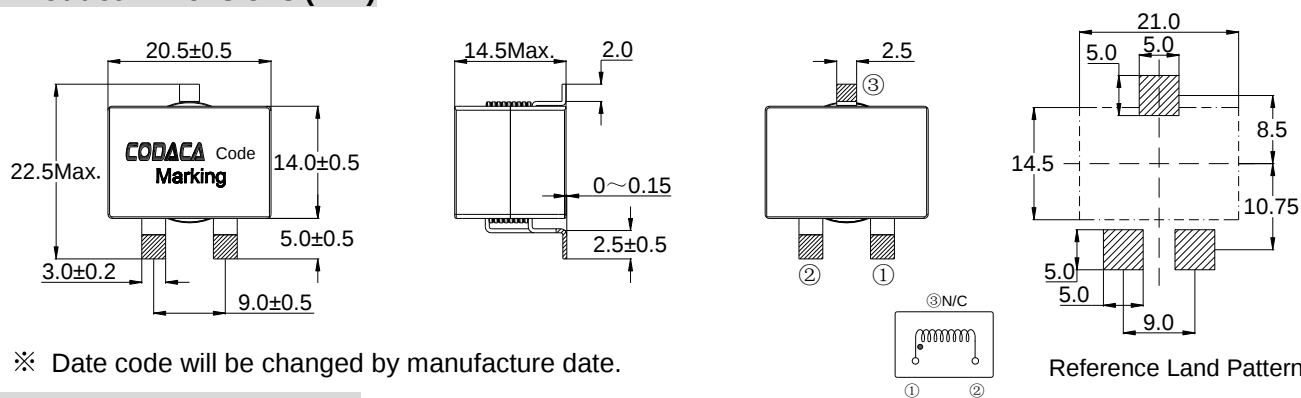

※ Date code will be changed by manufacture date.

2 Electrical Characteristics

Part No.	Inductance (μH)※1 ±20%	D.C.R. (mΩ)		Isat (A)※2 Typical	Irms (A)※3 Typical
		Typical	Max.		
CSEX2014L-1R0MC	1.00	0.66	0.79	110	58.9
CSEX2014L-1R8MC	1.80	0.86	1.02	80.0	51.5
CSEX2014L-2R8MC	2.80	1.32	1.58	58.0	40.0
CSEX2014L-4R0MC	4.00	1.92	2.30	49.0	34.2
CSEX2014L-5R4MC	5.40	2.54	3.04	44.0	30.3
CSEX2014L-7R0MC	7.00	3.30	3.96	36.5	26.2
CSEX2014L-9R0MC	9.00	4.25	5.10	32.5	21.9
CSEX2014L-110MC	11.0	5.90	7.08	29.5	18.2
CSEX2014L-140MC	14.0	6.50	7.80	26.0	17.5
CSEX2014L-160MC	16.0	7.10	8.50	23.8	15.8
CSEX2014L-190MC	19.0	8.60	10.0	22.0	14.6
CSEX2014L-220MC	22.0	9.28	11.1	21.3	14.0
CSEX2014L-240MC	24.0	10.0	12.0	20.0	13.5

All data is tested on 25°C ambient temperature

1. Inductance measure condition at 100kHz, 0.1V.
2. Isat: the actual value of DC current when the Inductance decrease 30% of its initial Value.
3. Irms: The actual value of DC current when the Temperature rise is ΔT50°C (Ta=25°C)

3 How to Order









CSEX2014L-1R0MC






Model

Dimensions









Value Code

4 Saturation Current vs Temperature Rise Current Curve

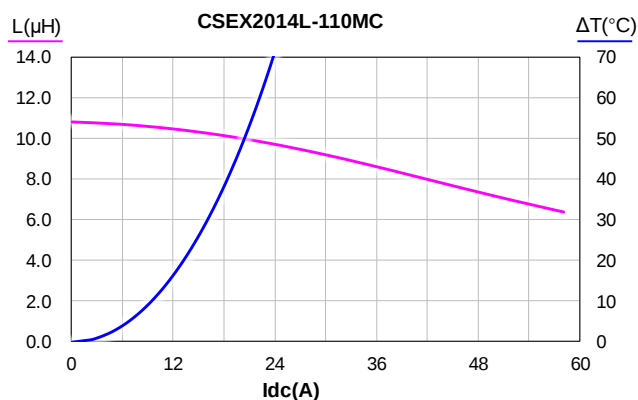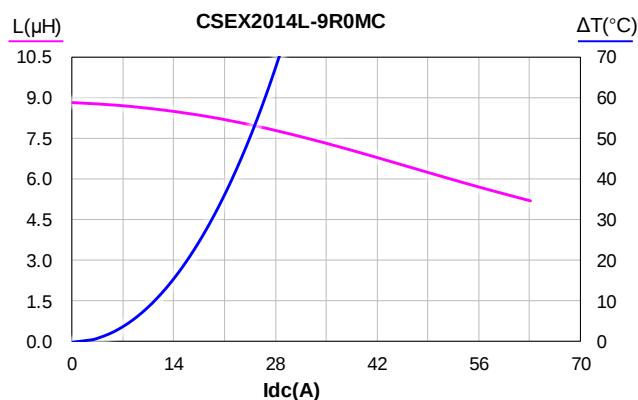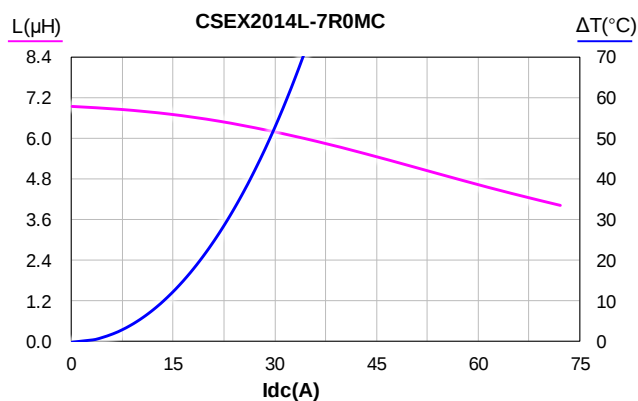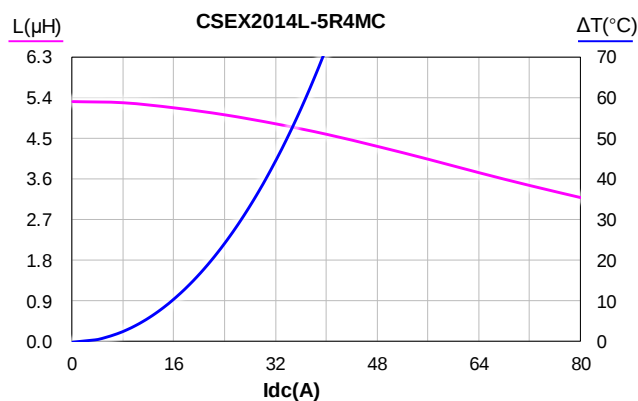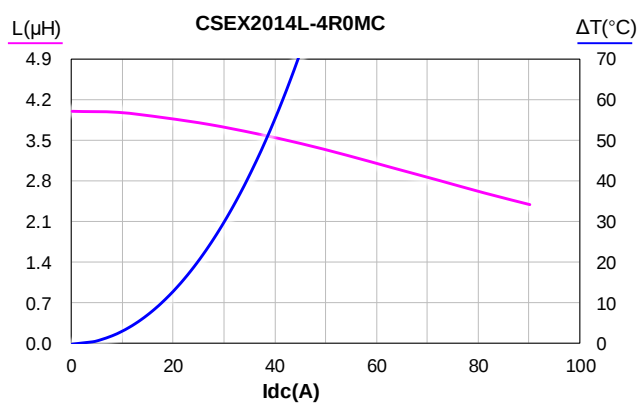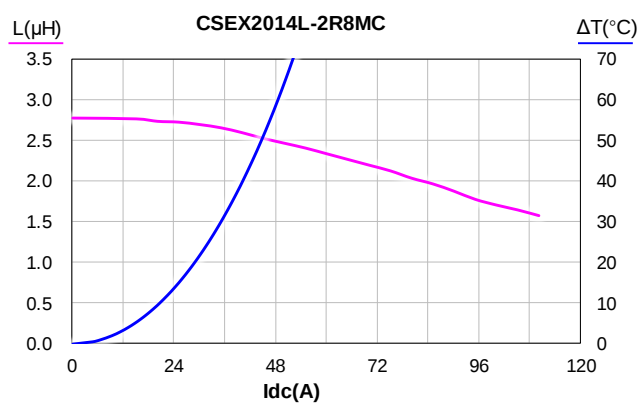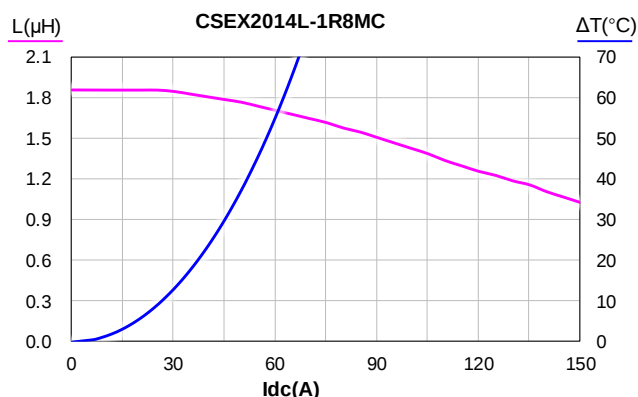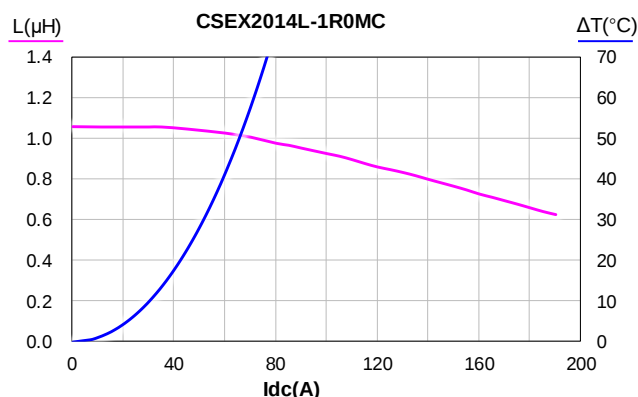


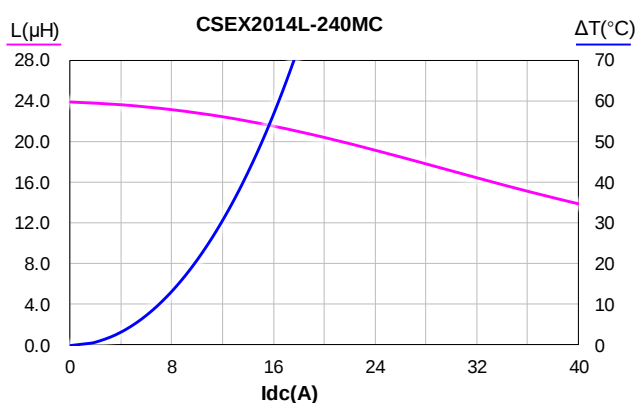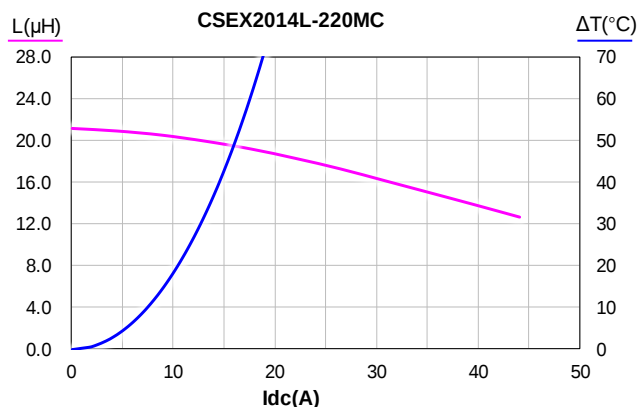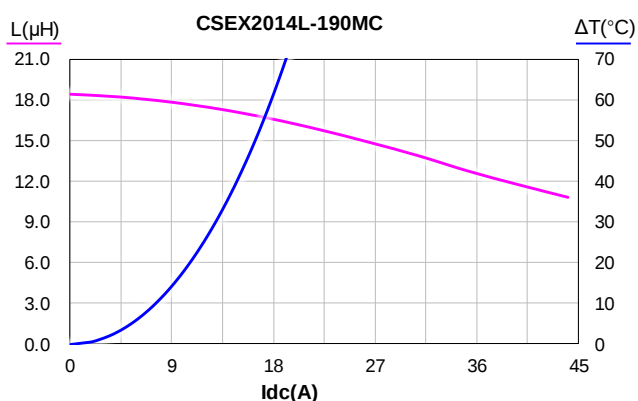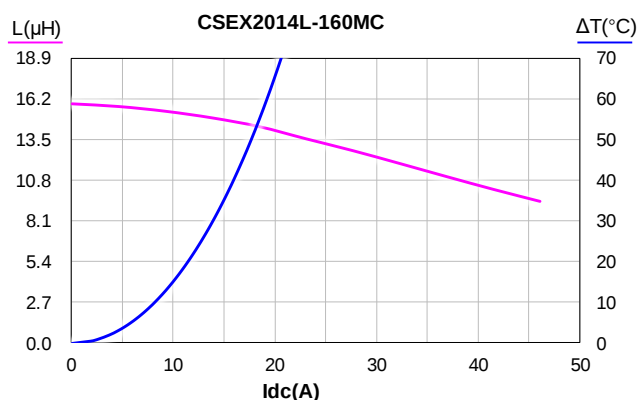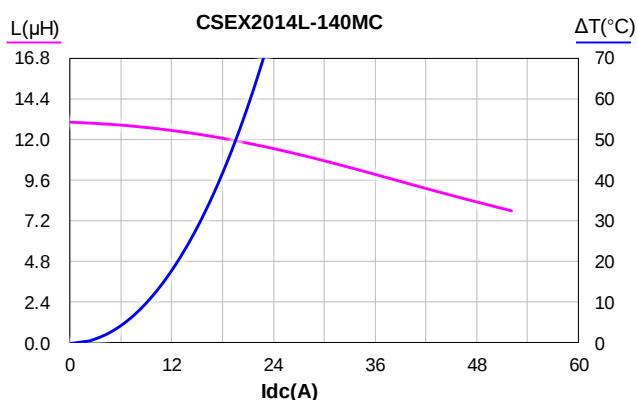


5 Inductance vs Frequency Curve

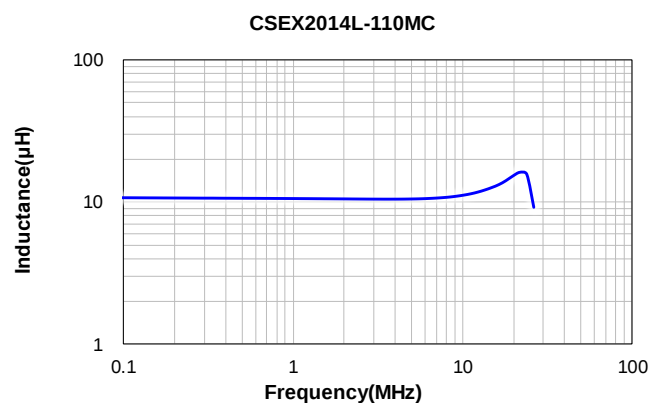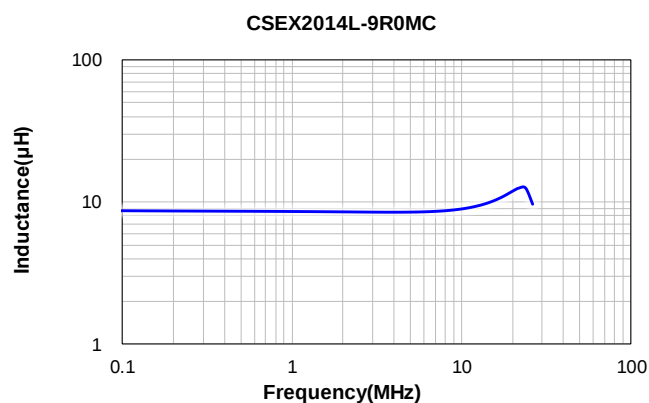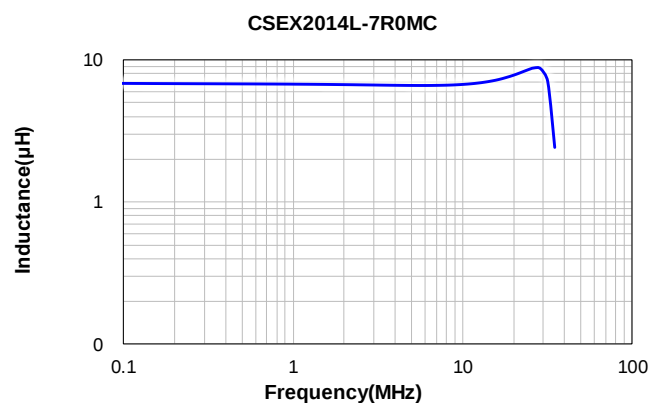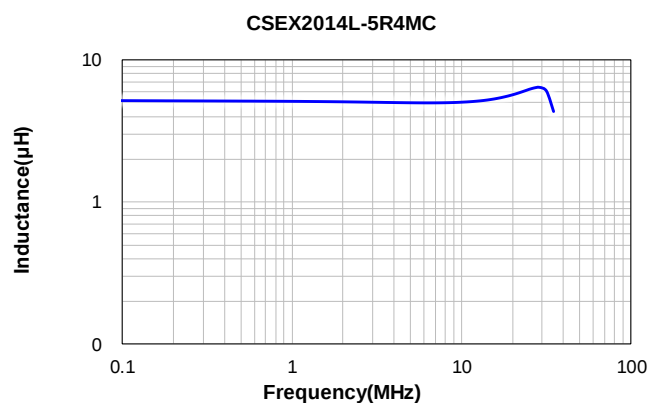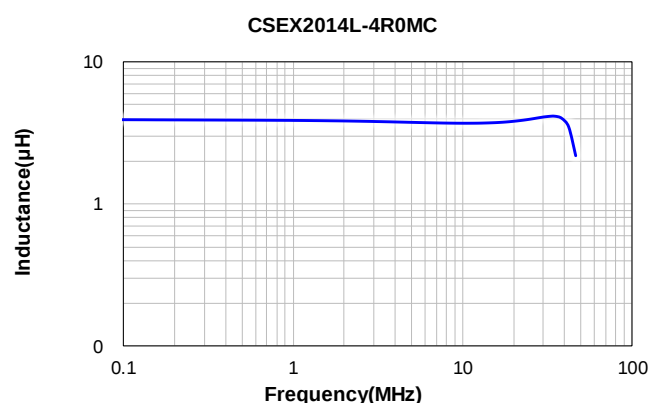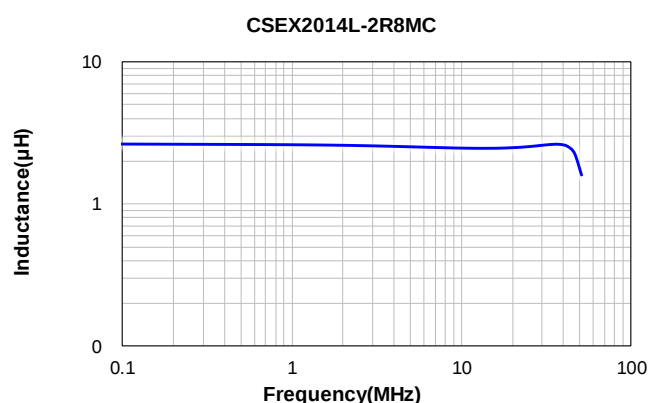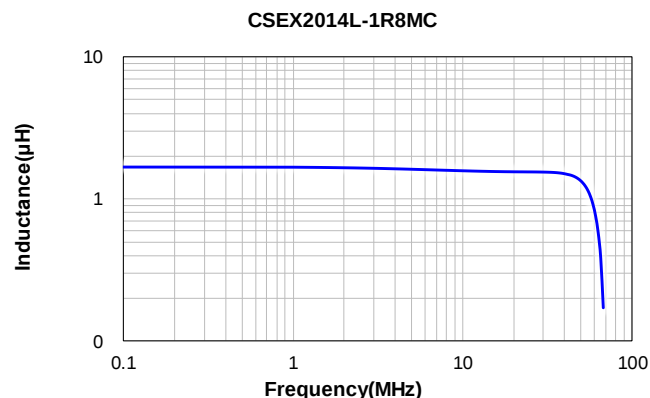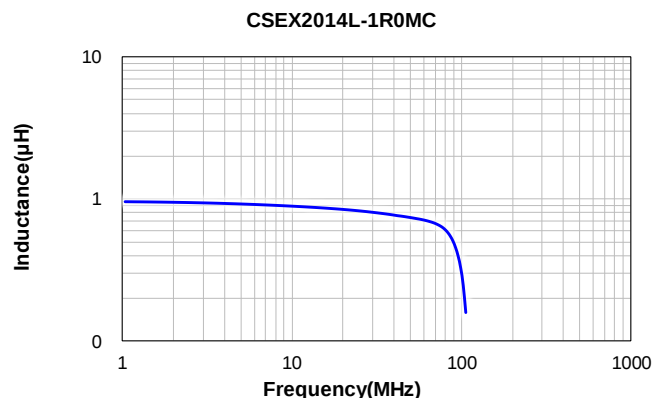


CSEX2014L-140MC

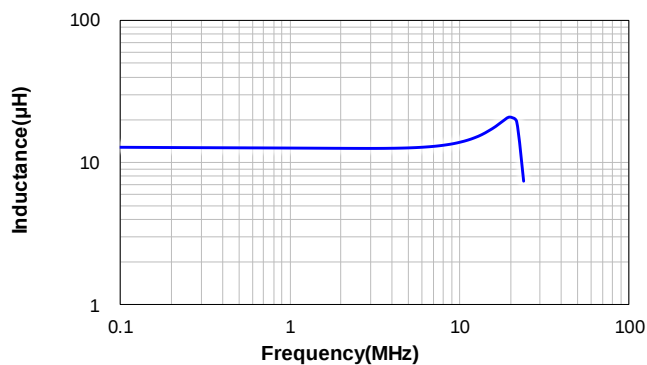


CSEX2014L-160MC

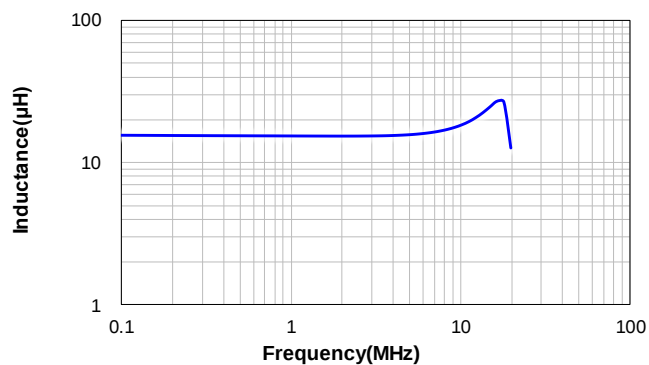


CSEX2014L-190MC

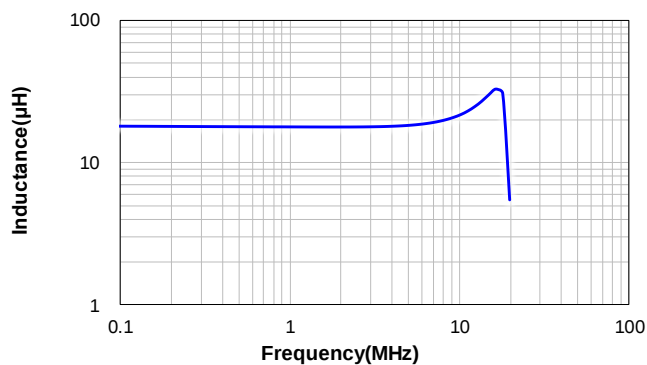









CSEX2014L-220MC

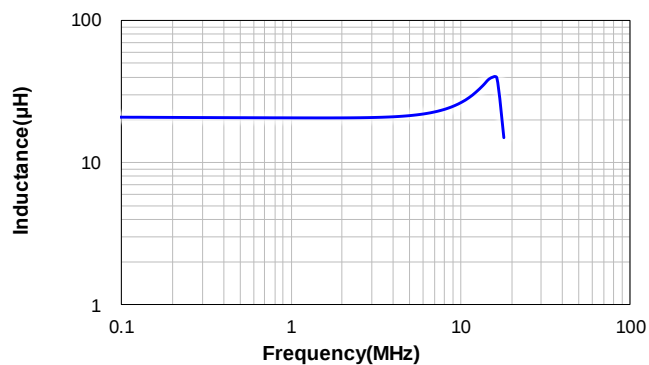


CSEX2014L-240MC

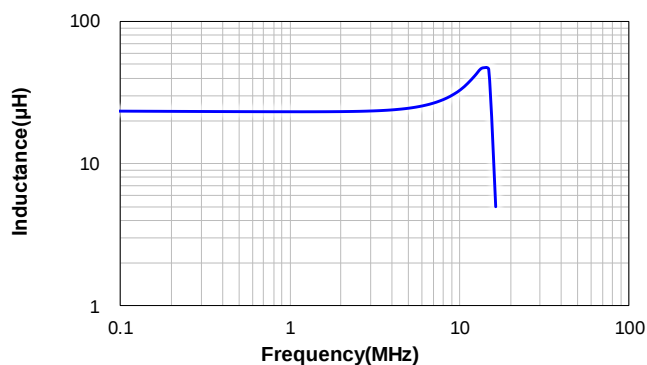


6 Impedance vs Frequency Curve

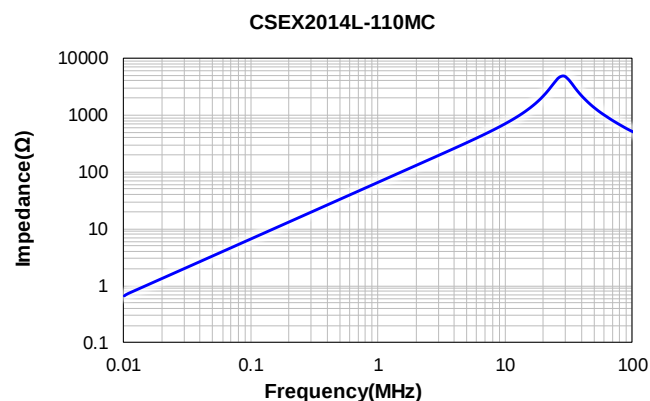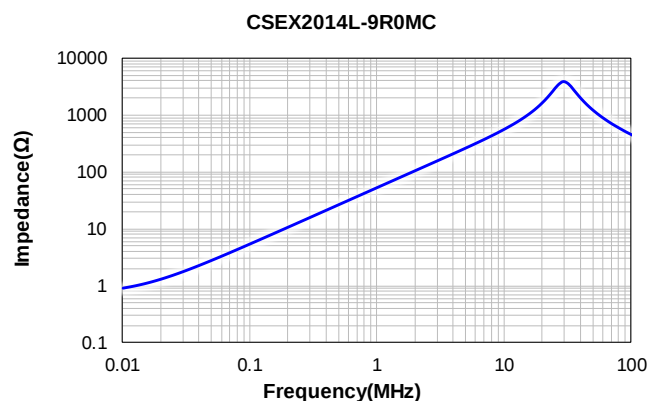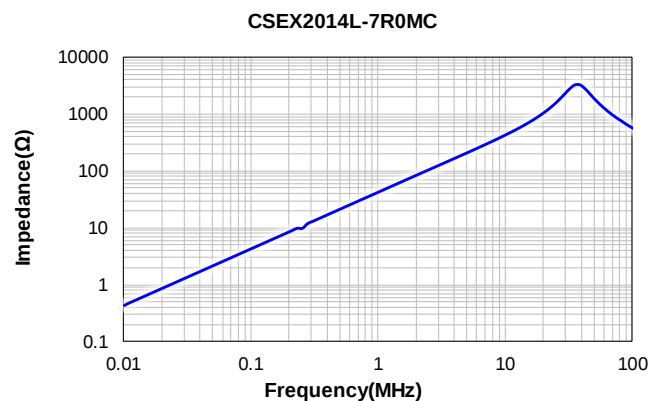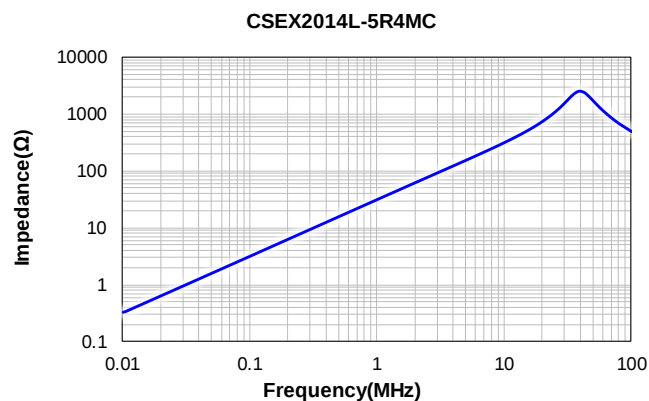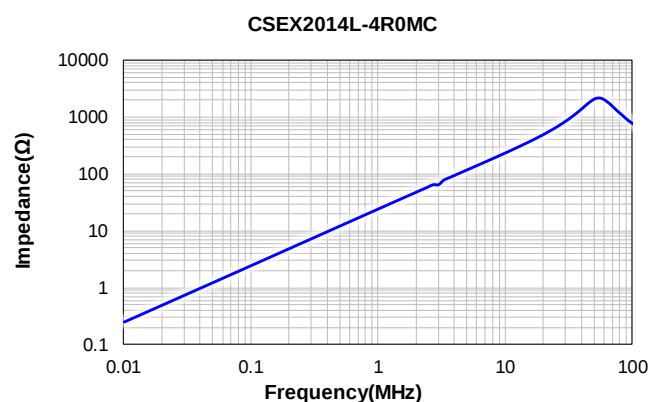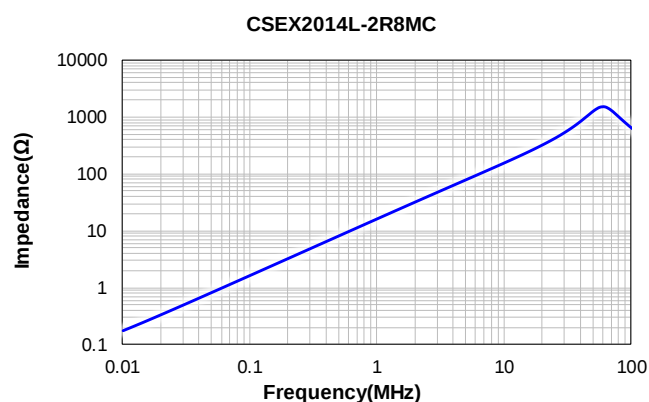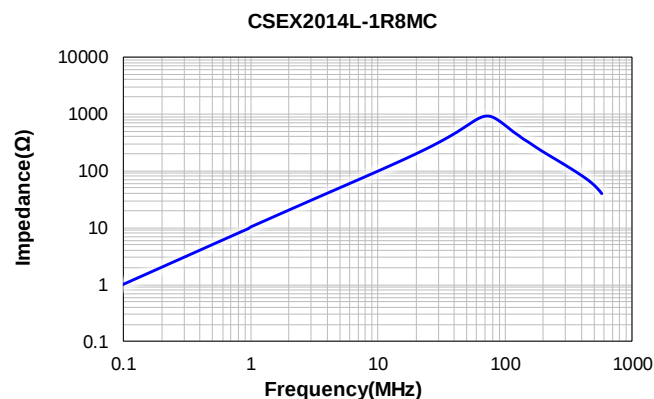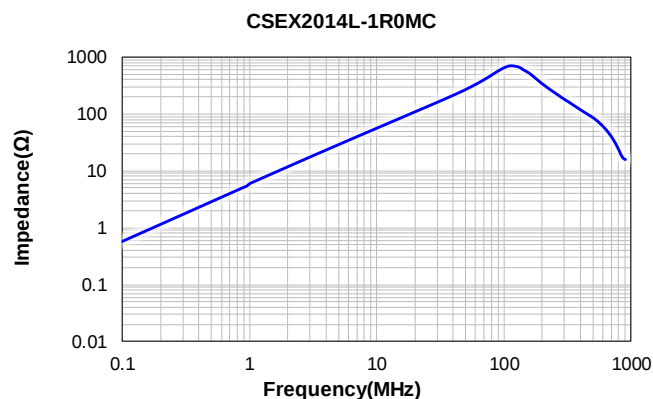


CSEX2014L-140MC

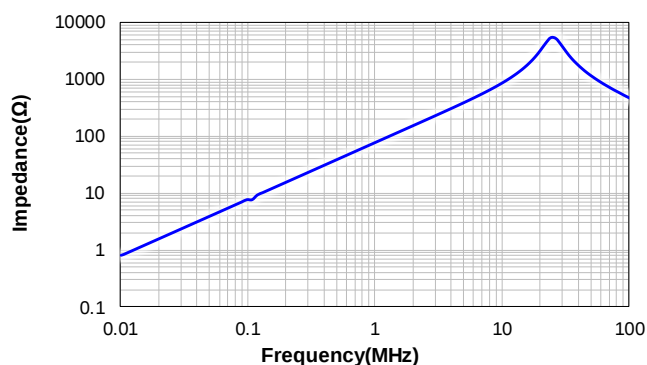


CSEX2014L-160MC

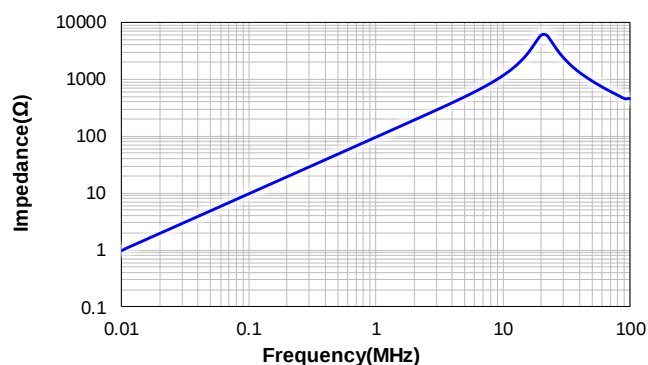


CSEX2014L-190MC

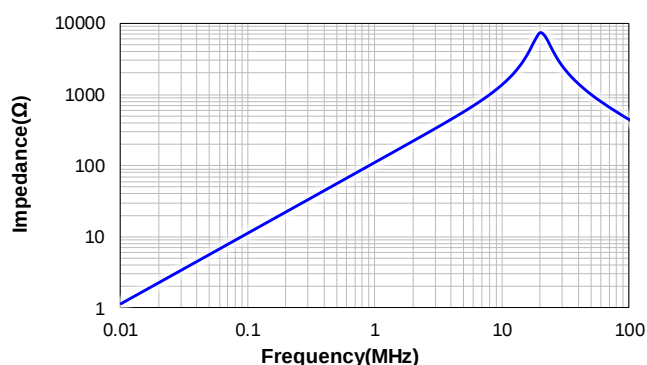


CSEX2014L-220MC

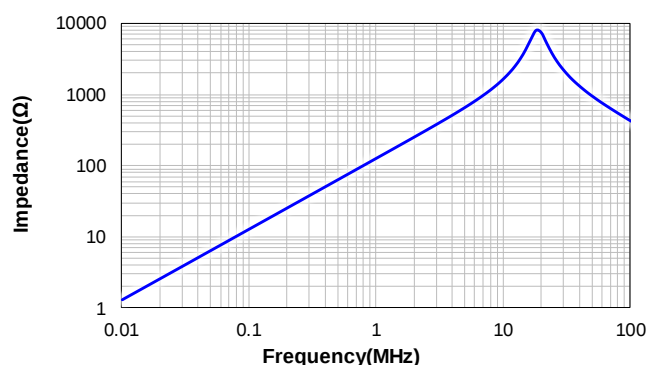

CSEX2014L-240MC

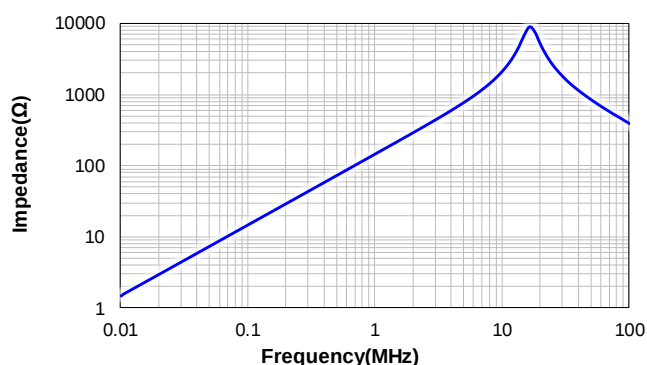

7.4 Reel Dimensions (mm)

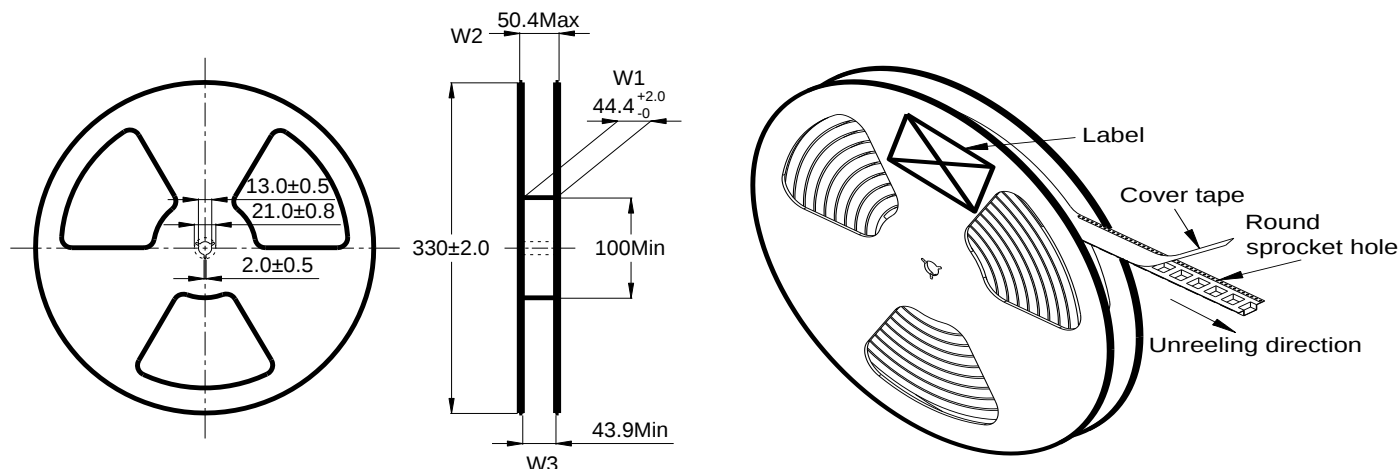

7.5 Carton Dimensions and Packing Quantity

■ Inner Carton: 340×340×135mm

■ Out Carton : 360×360×295mm

Product Series	Quantity / Reel	Inner Carton Quantity	Out Carton Quantity
CSEX2014L	100pcs	(100×2) = 200pcs	(200×2) = 400pcs

7.6 Label Making

The following items will be marked on the reel of product label and shipping label.

Production Label


- Packing No.
- Quantity
- Shipment Date
- Part No.
- Customer Part No.
- Customer Po No.

Shipping Label

- Packing No.
- Quantity
- Shipment Date
- Part No.
- Customer Part No.
- Customer Po No.

8 Soldering Specification

8.1 Reflow Profile for SMT Components

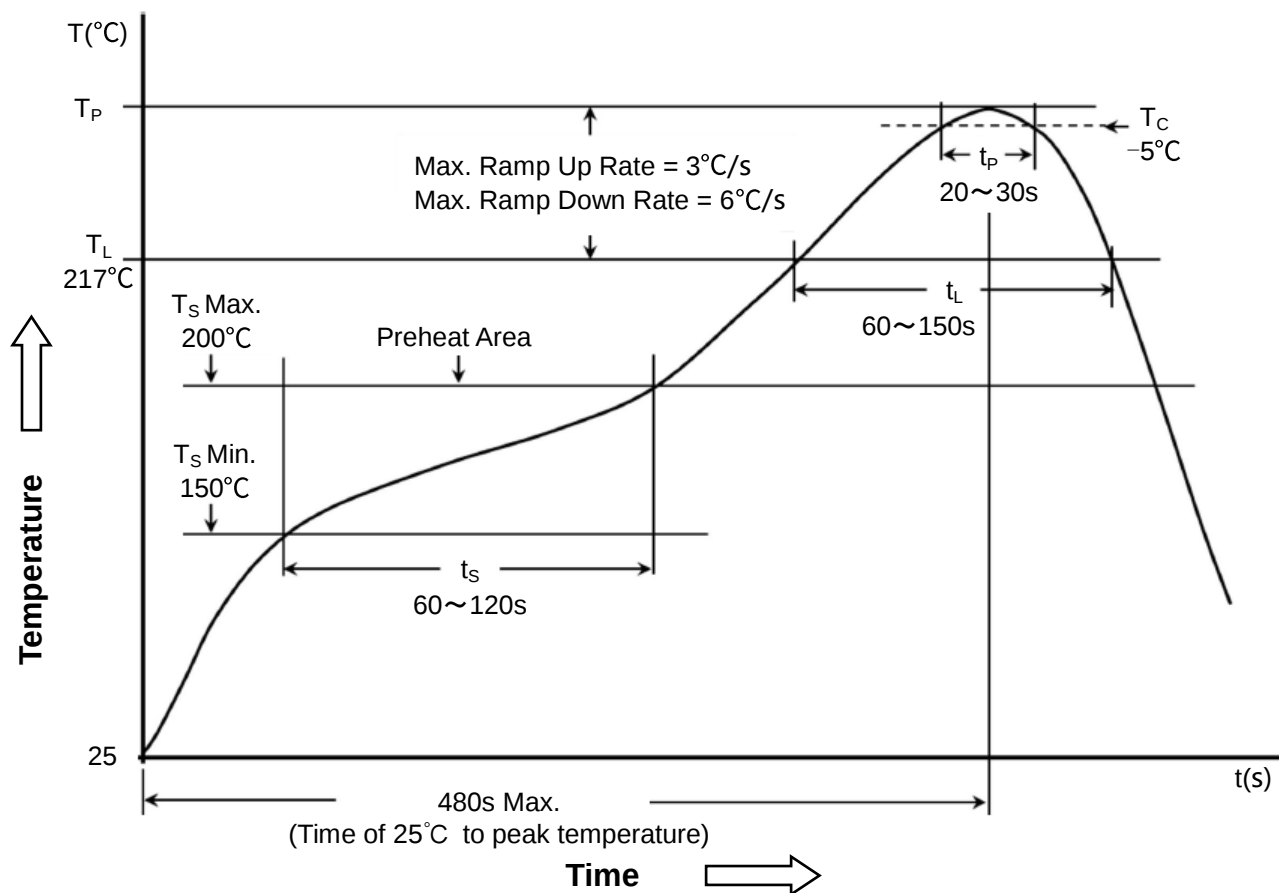

8.2 Classification of Peak Package Body Temperature (Tp)

	Package Thickness	Package Volume		
		<350 mm ³	350~2000 mm ³	>2000 mm ³
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6~2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

※ Reflow is referred to standard IPC/JEDEC J-STD-020E.

9 Notice of Use

- 9.1 Product in packing storage condition : temperature 5~40°C, RH≤70%.
If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminals (electrodes), affecting soldering status.
- 9.2 A storage of Codaca Electronic products for longer than 12 months is not recommended, Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- 9.3 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust or corrosion.
- 9.4 Always handle products with care.
- 9.5 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering.
Always ensure optimum conditions for soldering.
- 9.6 When this product will be used on a similar or new project to the original one, sometimes it might be unable to satisfy the specifications due to different condition of usage.
- 9.7 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., or use in abnormal conditions protective devices or protection circuit in the end product.
- 9.8 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.
- 9.9 If using in potting compound, the magnet wire coating might be damaged, please consult with us.
- 9.10 Refrain from rinsing product. If necessary, please consult with us.
- *9.11 Codaca Electronic products without "V" prefix are qualified for industrial product requirement , and with "V" prefix are qualified for AEC-Q200, but it doesn't mean that Codaca Electronic products can absolutely meet specific industry norms and quality test standards in automotive electronics or more strict application fields . Codaca Electronic will be exempted from being responsible for the consequences of using Codaca products in automotive electronic or higher application field related to safety when without being aware of it.