



Outline:

- Three-terminal welding structure, reliable welding, better vibration resistance.
- Flat wire winding, good heat dissipation and low temperature rise.
- Closed magnetic circuit, effectively preventing magnetic field leakage and external interference.

Features:

- Core material: Ferrite
- Environmental: RoHS compliant, halogen free.
- Weight: 16.46g~25.64g
- Moisture Sensitivity: Level (MSL) 1
(Unlimited floor life at <30°C / 85% relative humidity)
- Operating temperature range: -55°C~+155°C
(Including coil's temperature rise).
- Storage temperature range: -55°C~+155°C





Application:

- Ideally used in server application.
- High current power supplies, Battery power devices.
- DC/DC converters in distributed power systems.

Construction Wire




1 Product Dimensions (mm)



※ Date code will be changed by manufacture date.

2 Electrical Characteristics

Part No.	Inductance (μH)※1	D.C.R. (mΩ)		Isat (A)※2		Irms (A)※3	Height (mm)
	±10%	Typical	Max.	@25°C	@100°C	Typical	±0.5
VSM2210-1R0K	1.00	0.55	0.70	50.0	45.0	30.0	9.80
VSM2211-1R5K	1.50	0.80	1.00	50.0	43.0	30.0	10.7
VSM2212-2R2K	2.20	1.00	1.20	43.0	38.0	30.0	12.1
VSM2214-3R3K	3.30	1.20	1.40	34.0	29.0	30.0	14.1
VSM2210-4R7K	4.70	2.00	2.40	22.0	19.0	19.0	9.80
VSM2210-6R8K	6.80	2.40	2.90	19.0	16.5	19.0	9.80
VSM2211-100K	10.0	3.30	3.90	18.3	16.0	19.0	10.7
VSM2212-150K	15.0	4.20	5.00	15.3	13.5	19.0	12.1
VSM2214-200K	20.0	5.50	6.60	14.3	12.0	19.0	14.1
VSM2214-290K	29.0	5.90	7.10	11.0	9.50	19.0	14.1
VSM2214-350K	35.0	5.90	7.10	9.30	7.50	19.0	14.1



Reference Land Pattern

Schematic

All data is tested on 25°C ambient temperature









- Inductance measure condition at 100kHz, 0.1V.
- Isat: the actual value of DC current when the Inductance decrease 10% of its initial Value.
- Irms: The actual value of DC current when the Temperature rise is ΔT40°C (Ta=25°C)




3 How to Order

VSM2214-1R5K









Model _____
Dimensions _____
Value Code _____
Tolerance _____

4 Saturation Current vs Temperature Rise Current Curve

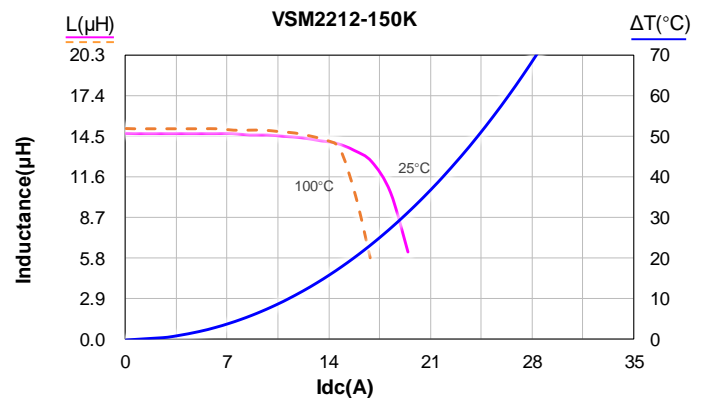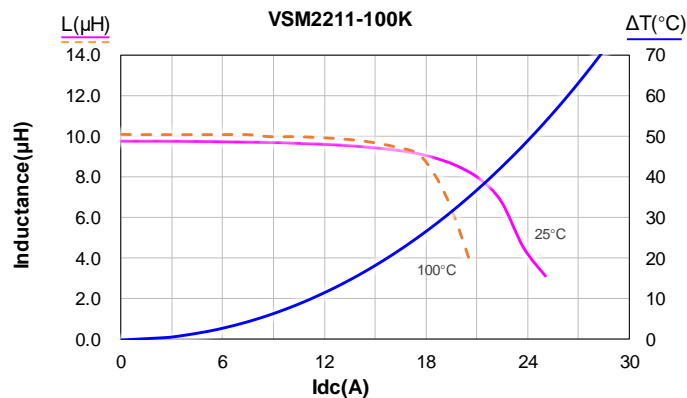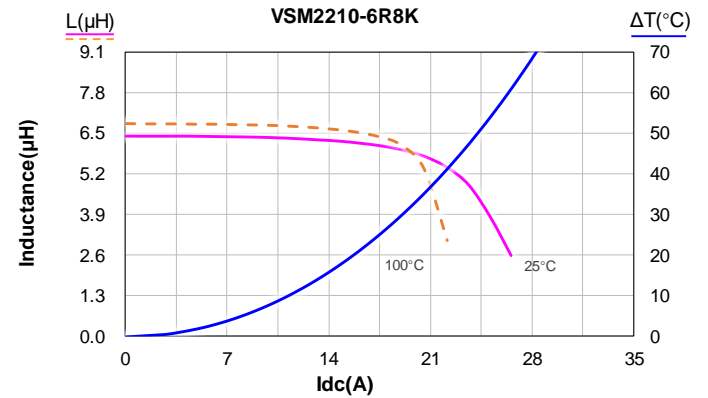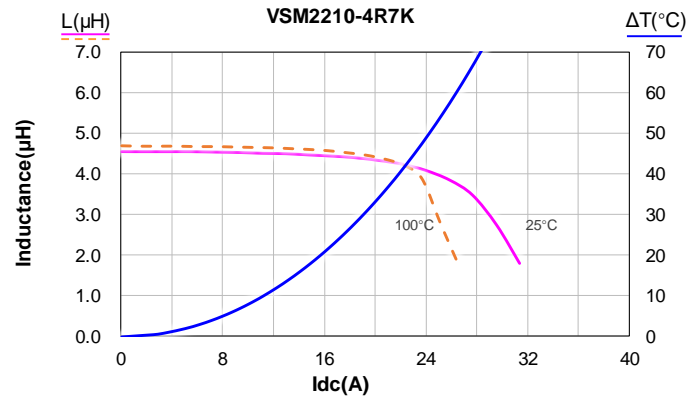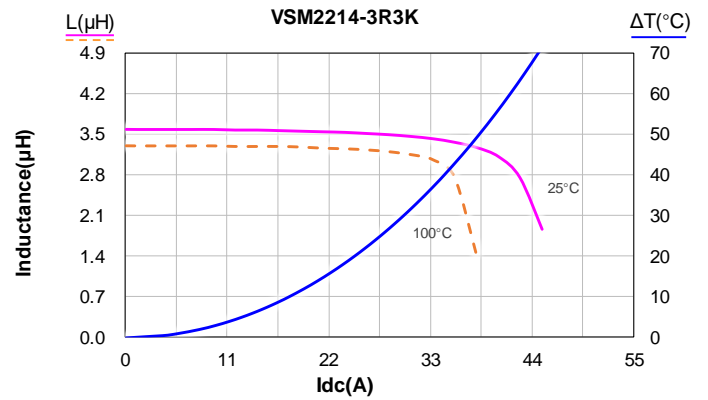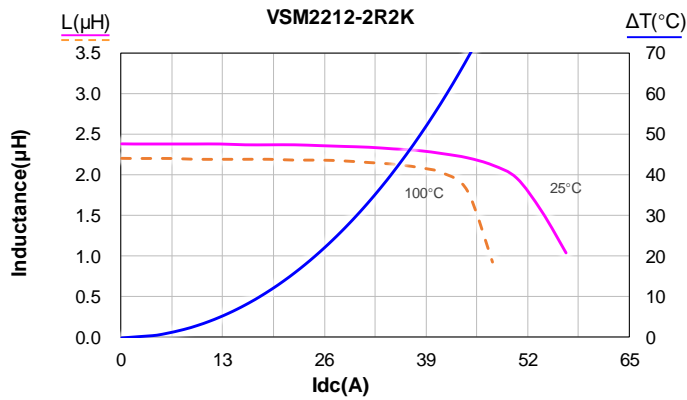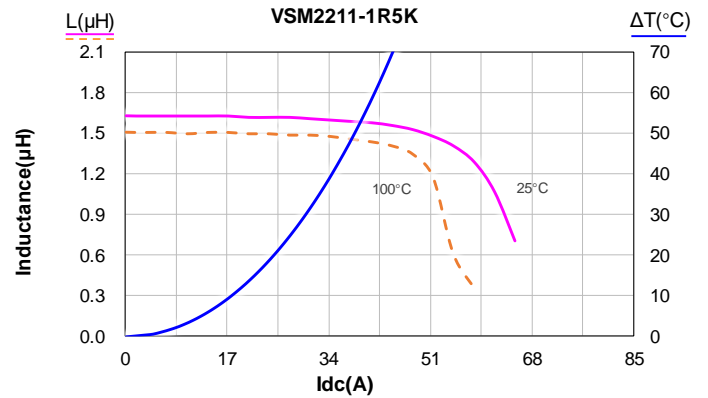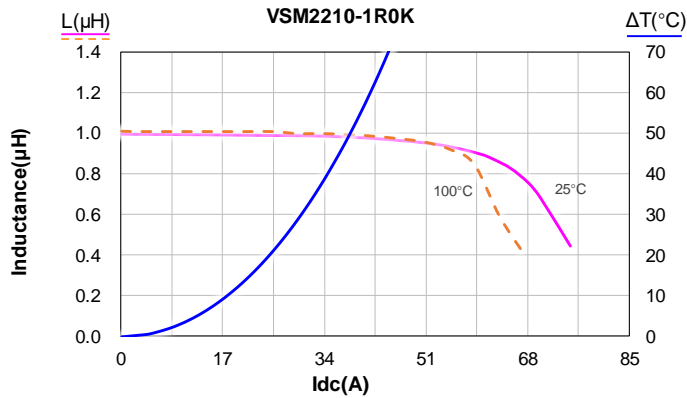


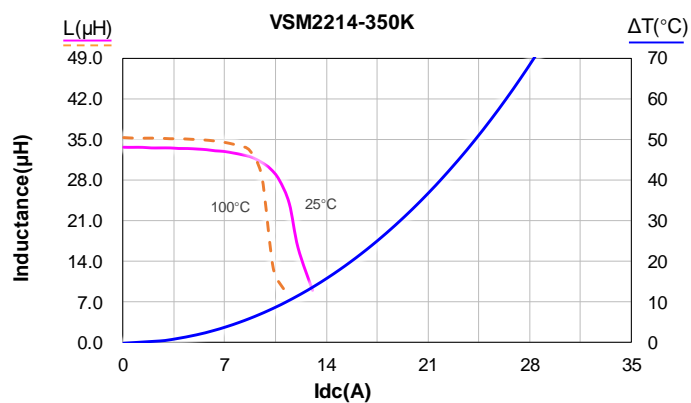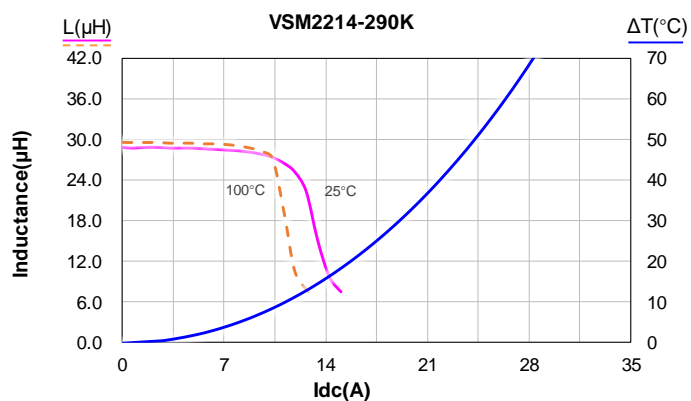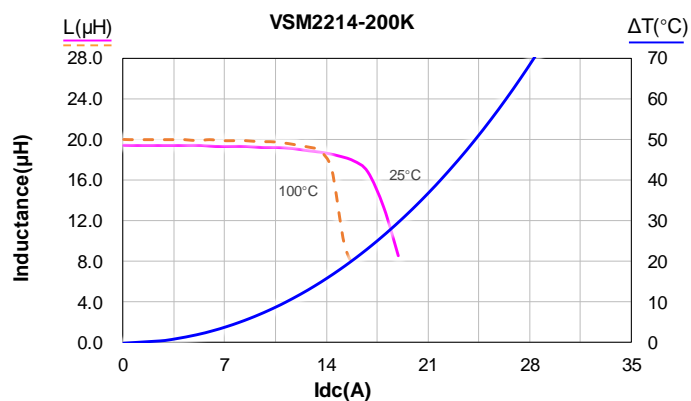


5 L vs Frequency

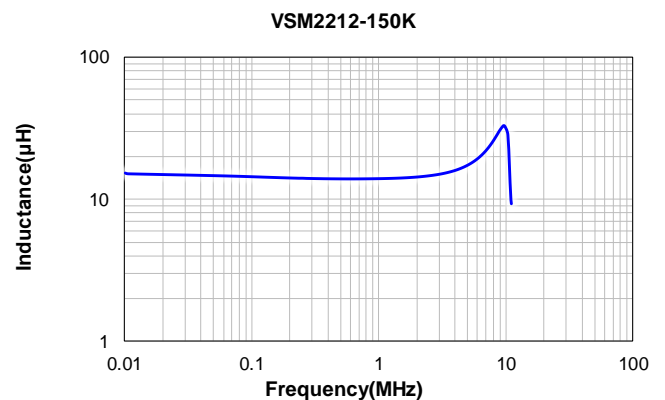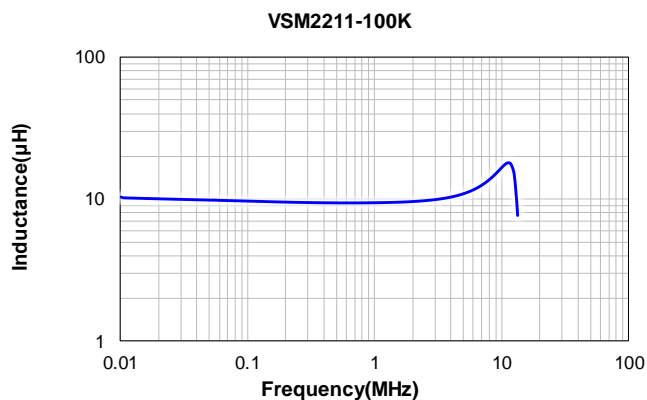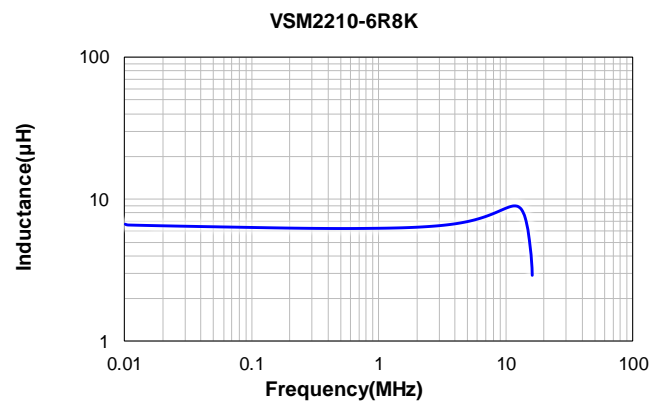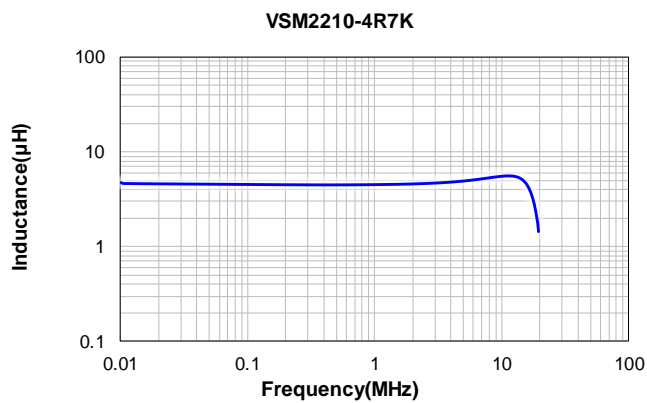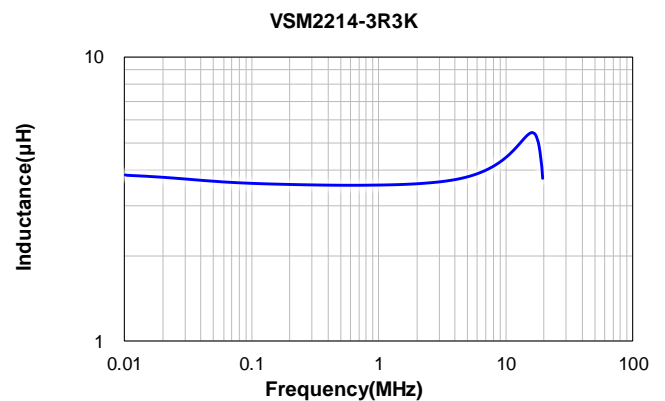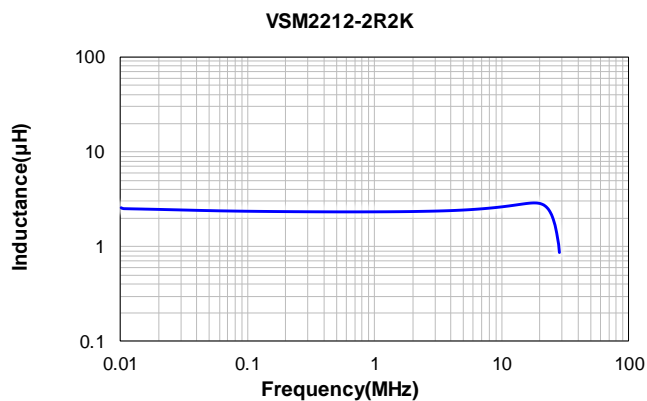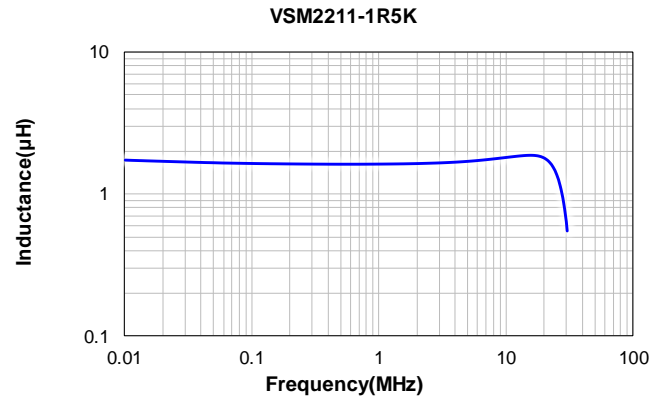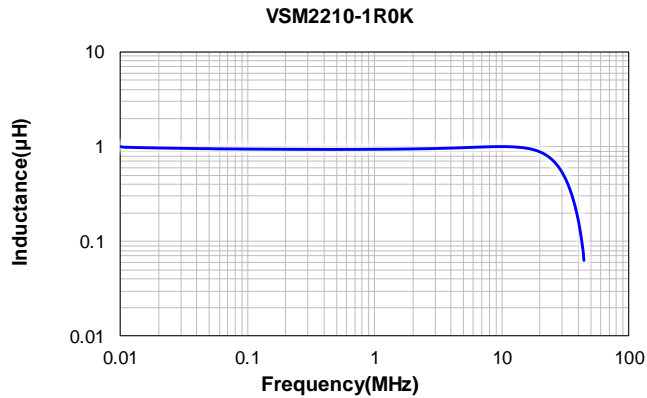


VSM2214-200K

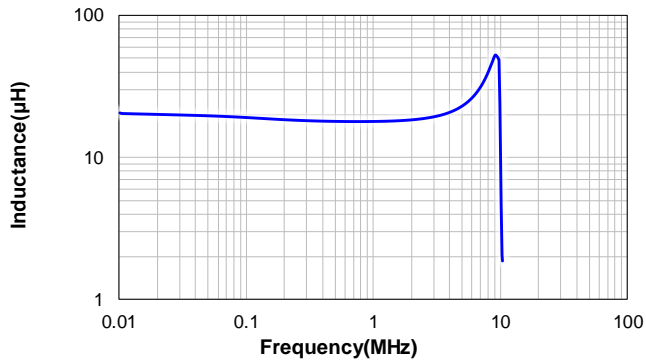









VSM2214-290K

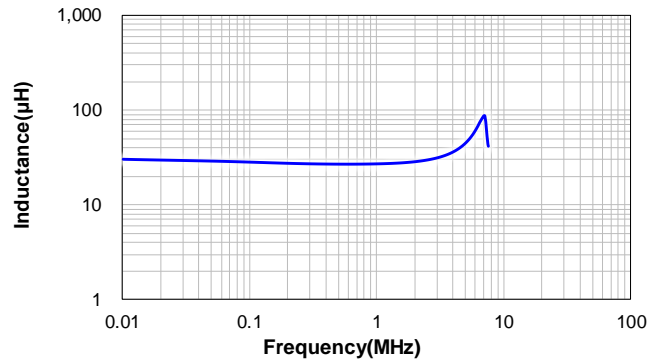


VSM2214-350K

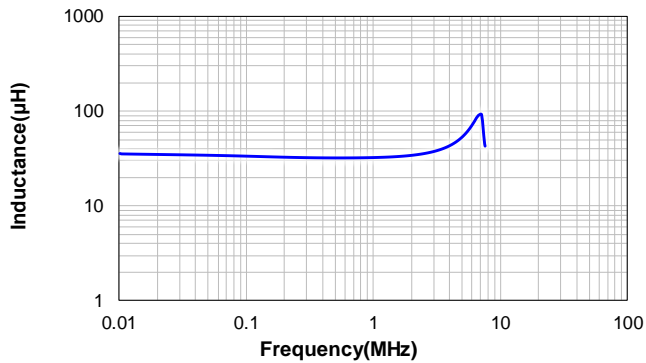


6 Impedance vs Frequency

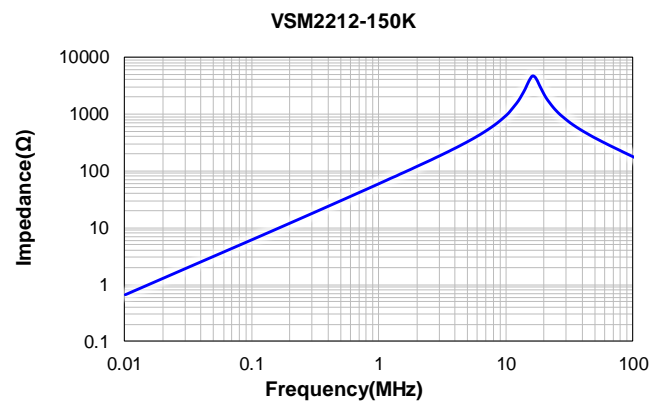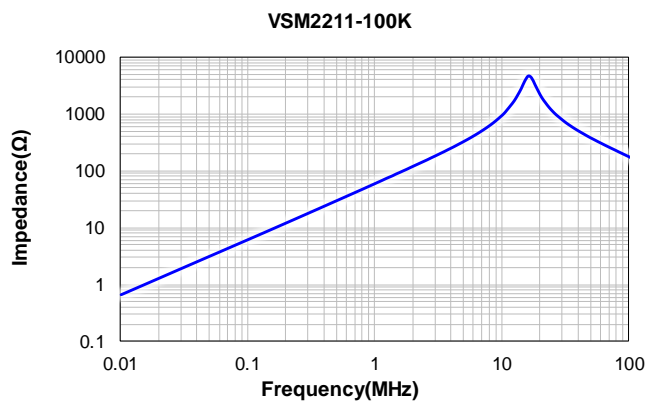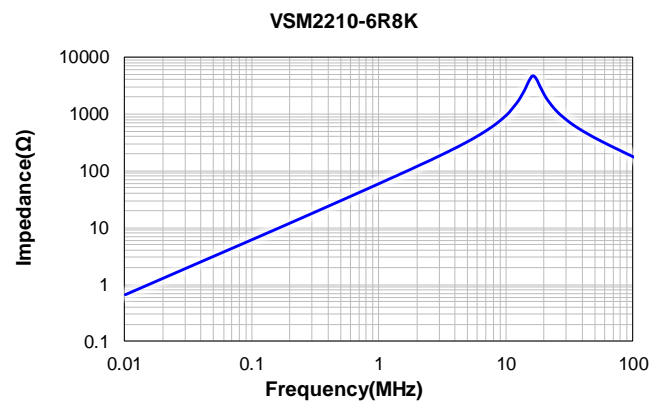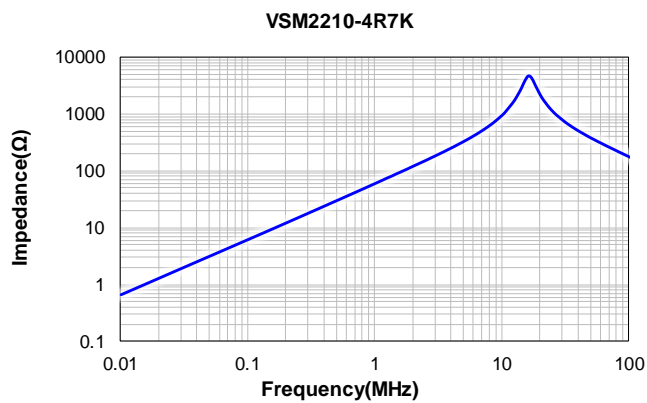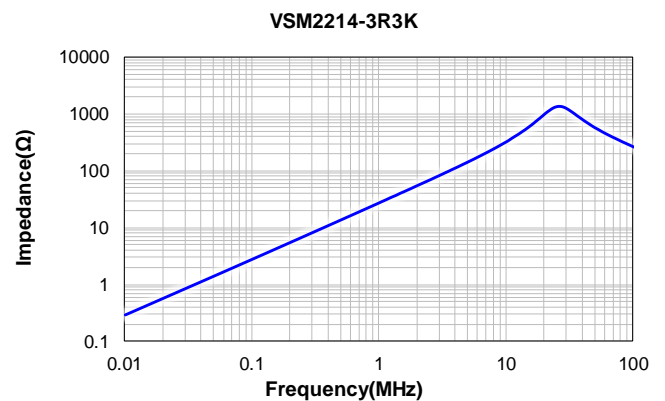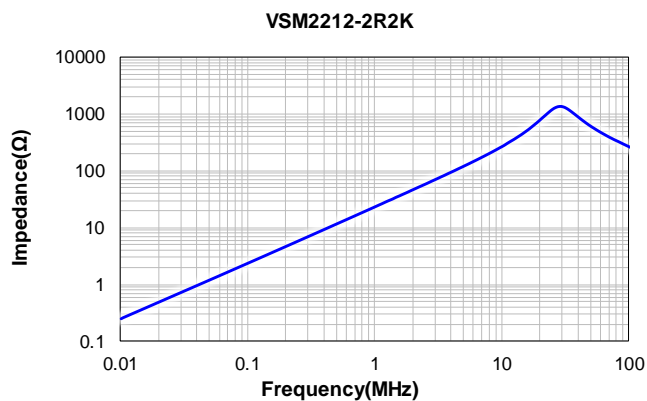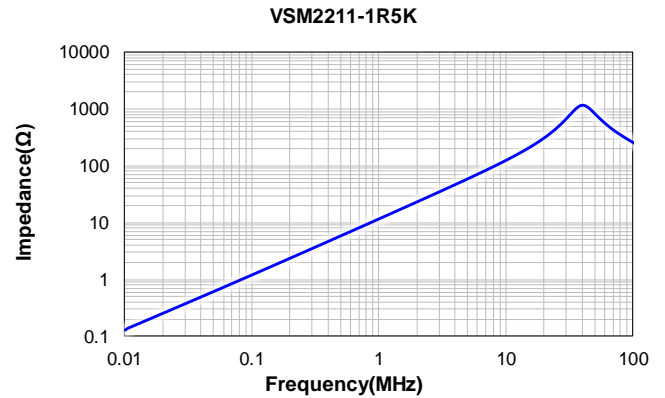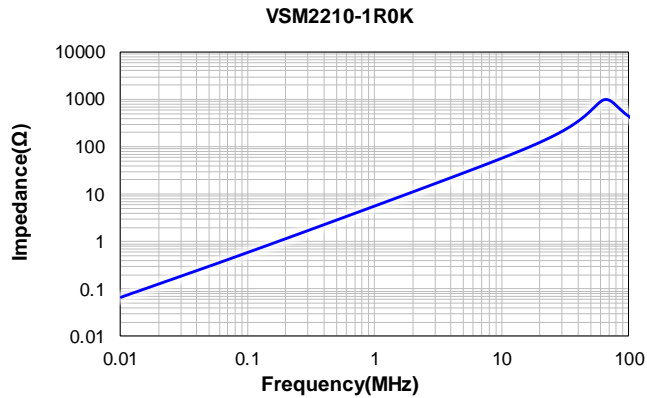


VSM2214-200K

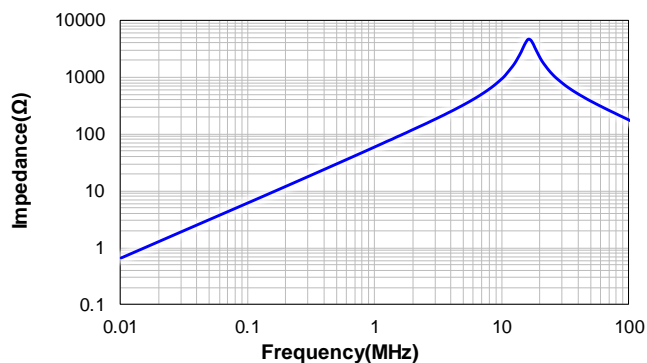

VSM2214-290K

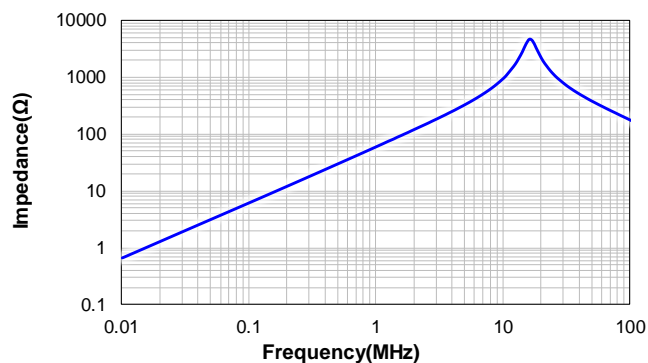


VSM2214-350K

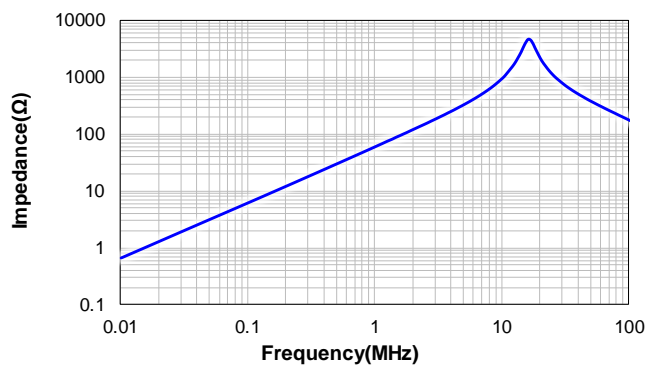

7 Packing Specification


7.1 Carrier Tape Dimensions (mm)

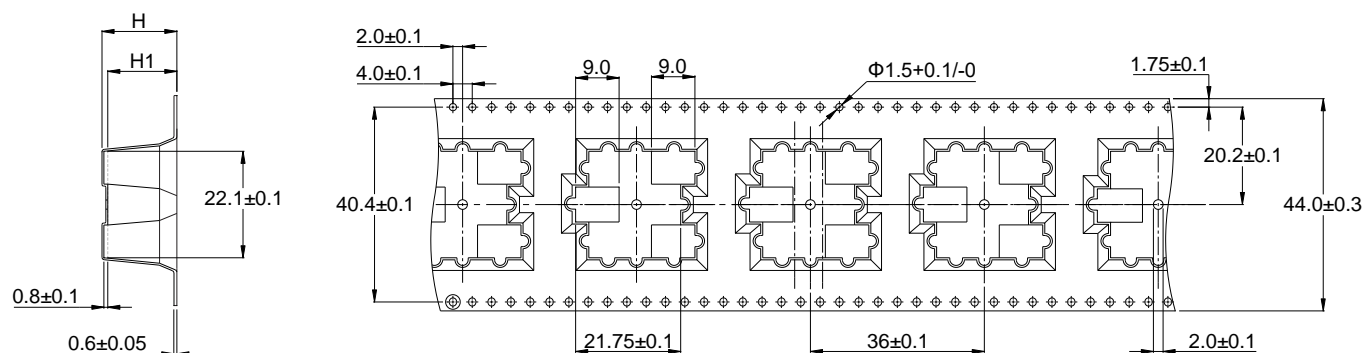

Product Series	VSM2210-Serise	VSM2211-Serise	VSM2212-Serise	VSM2214-Serise
Hight (H)	11.3	12.1	13.4	15.6
Hight (H1)	9.5	10.3	11.6	13.8

※ Packing is referred to the international standard IEC 60286-3.

7.2 Reel Dimensions (mm)

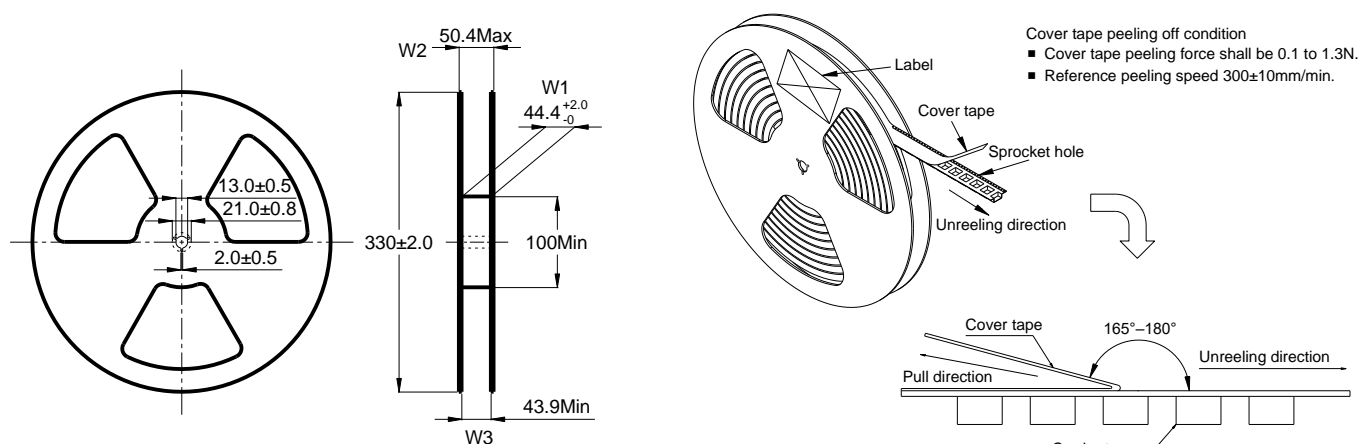

7.3 Carton Dimensions and Packing Quantity

■ Inner Carton: 340×340×135mm

■ Out Carton : 360×360×295mm

Product Series	Quantity / Reel	Inner Carton Quantity	Out Carton Quantity
VSM2210-Serise	130pcs	(130x2)=260pcs	(260x2)=520pcs
VSM2211-Serise	110pcs	(110x2)=220pcs	(220x2)=440pcs
VSM2212-Serise	100pcs	(100x2)=200pcs	(200x2)=400pcs
VSM2214-Serise	80pcs	(80x2)=160pcs	(160x2)=320pcs

8 Notice of Use

- 8.1 Special remind:Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.
- 8.2 Product in packing storage condition:temperature 5~40°C, RH≤70%.
If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminals (electrodes), affecting soldering status.
- 8.3 A storage of Codaca Electronic products for longer than 12 months is not recommended, Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- 8.4 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust or corrosion.
- 8.5 Always handle products with care.
- 8.6 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering.
Always ensure optimum conditions for soldering.
- 8.7 When this product will be used on a similar or new project to the original one,
sometimes it might be unable to satisfy the specifications due to different condition of usage.
- 8.8 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., or use in abnormal conditions protective devices or protection circuit in the end product.
- 8.9 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.
- 8.10 If using in potting compound, the magnet wire coating might be damaged, please consult with us.
- 8.11 Refrain from rinsing product. If necessary, please consult with us.
- * 8.12 Codaca Electronic products without "V" prefix are qualified for industrial product requirement , and with "V" prefix are qualified for AEC-Q200, but it doesn't mean that Codaca Electronic products can absolutely meet specific industry norms and quality test standards in automotive electronics or more strict application fields . Codaca Electronic will be exempted from being responsible for the consequences of using Codaca products in automotive electronic or higher application field related to safety when without being aware of it.