


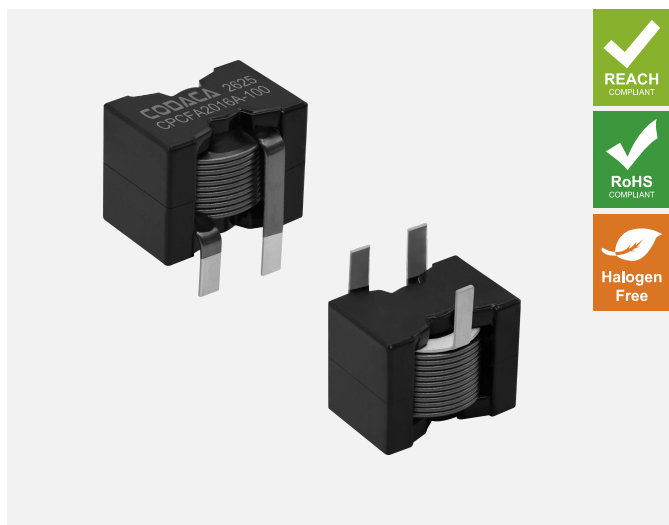

Outline:

- Low loss, high efficiency, wide operating frequency, and broad applicability.
- Flat wire winding with good heat dissipation and low temperature rise.
- Excellent DC bias capability to handle instantaneous peak current.
- Closed magnetic circuit, reducing electromagnetic radiation and conduction interference to improve electromagnetic compatibility(EMC).


Features:

- Environmental: RoHS compliant, halogen free.
- Weight: 21.50g
- Moisture Sensitivity: Level (MSL) 1 (unlimited floor life at 5 ~ 40°C, RH ≤ 70% relative humidity).
- Operating temperature range: -55°C ~ +155°C. (Including Self-heating).
- Storage temperature range: -55°C ~ +155°C.

Application:


- Ideally used in new energy system, industrial control.
- High current power supplies, Battery power devices.
- DC/DC converters in distributed power systems.
- Communication equipment, artificial intelligence.

1 Product Dimensions (mm)

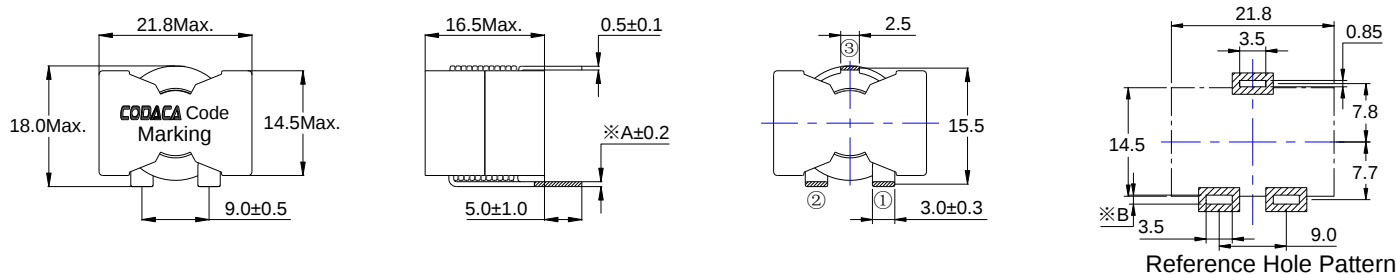

Inductance	1.80μH	2.60μH	3.30μH	4.50μH	5.70μH	7.00μH	8.50μH	10.0μH	14.0μH	18.0μH	23.0μH	31.0μH
A(mm)	1.50	1.20	1.10	1.00	0.80	0.80	0.70	0.65	0.50	0.45	0.40	0.35
B(mm)	2.10	1.80	1.70	1.60	1.40	1.40	1.30	1.30	1.30	1.10	1.00	1.00

※ Date code will be changed by manufacture date.



2 Electrical Characteristics

Part No.	Inductance (μH)※1	D.C.R. (mΩ)		Isat (A)※2	Irms (A)※3
		±20%	Typical Max.		
CPCFA2016A-1R8MC	1.80	0.94	1.15	72.0	48.0
CPCFA2016A-2R6MC	2.60	1.27	1.50	62.0	39.0
CPCFA2016A-3R3MC	3.30	1.60	1.90	54.0	36.0
CPCFA2016A-4R5MC	4.50	2.15	2.60	48.0	30.0
CPCFA2016A-5R7MC	5.70	2.80	3.20	42.0	22.5
CPCFA2016A-7R0MC	7.00	3.10	3.50	35.0	22.0
CPCFA2016A-8R5MC	8.50	3.95	4.75	34.0	21.0
CPCFA2016A-100MC	10.0	4.50	5.20	31.0	17.5
CPCFA2016A-140MC	14.0	6.90	8.30	26.0	15.0
CPCFA2016A-180MC	18.0	8.60	10.3	23.0	13.0
CPCFA2016A-230MC	23.0	10.0	12.4	20.0	12.0
CPCFA2016A-310MC	31.0	14.4	17.3	18.0	10.0

All data is tested on 25°C ambient temperature

- Inductance measure condition at 100kHz, 0.1V.
- Isat: the actual value of DC current when the Inductance decrease 20% of its initial Value.
- Irms: The actual value of DC current when the Temperature rise is ΔT40°C (Ta=25°C)

3 How to Order

CPCFA2016A-1R8MC









Model _____





Dimensions _____

Value Code _____









Coating _____





4 Saturation Current vs Temperature Rise Current Curve

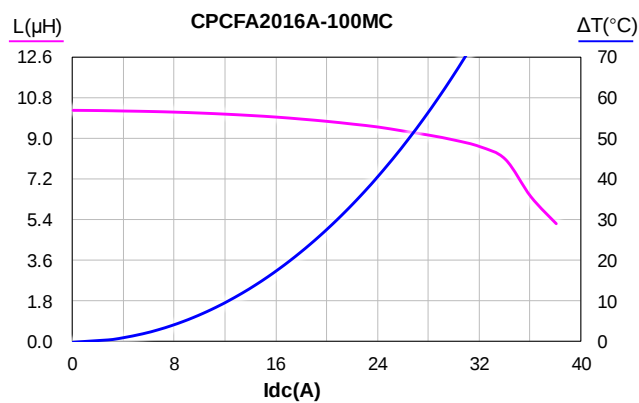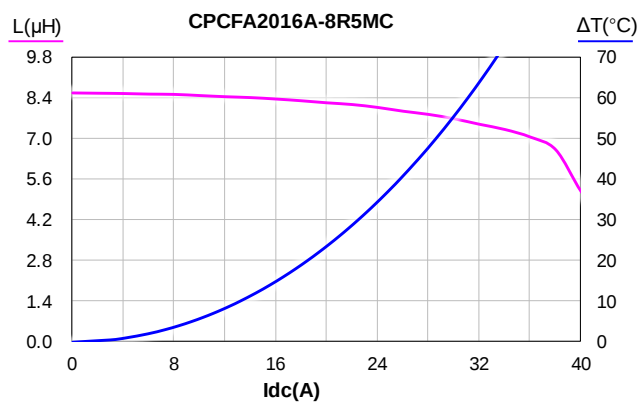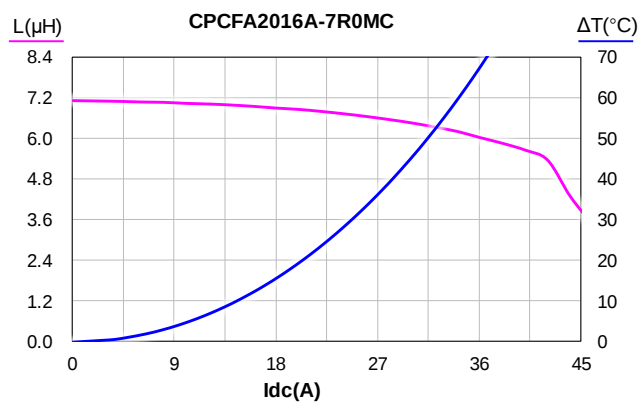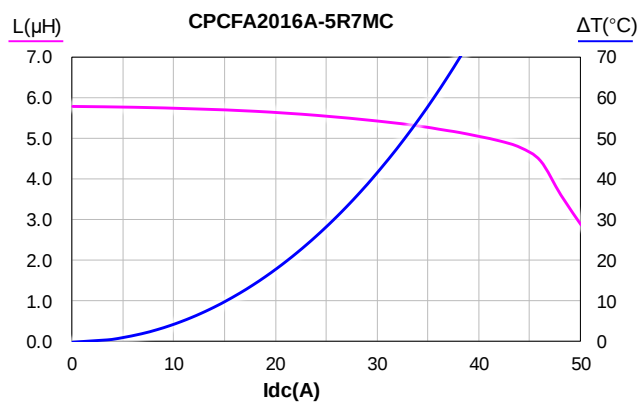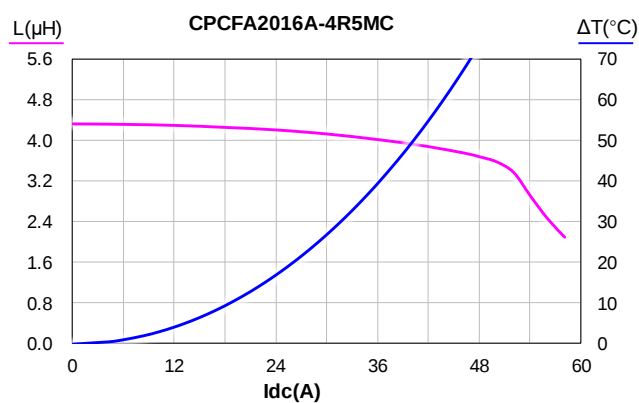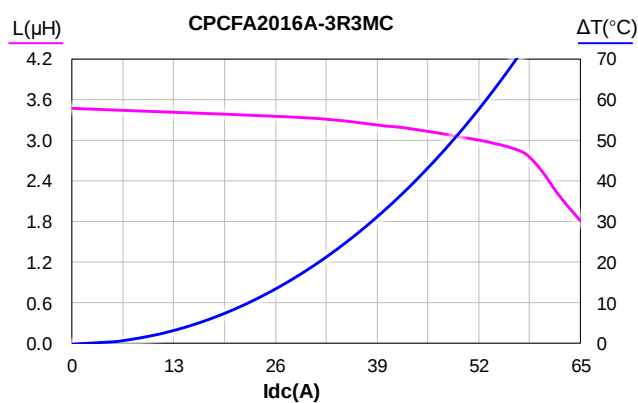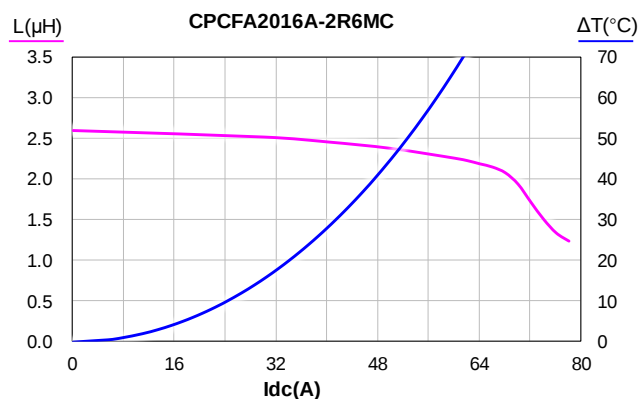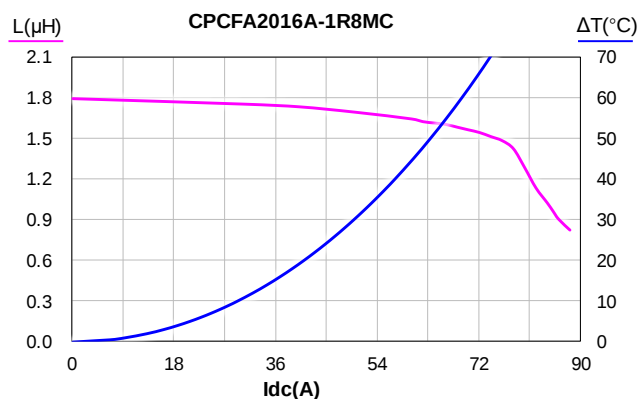





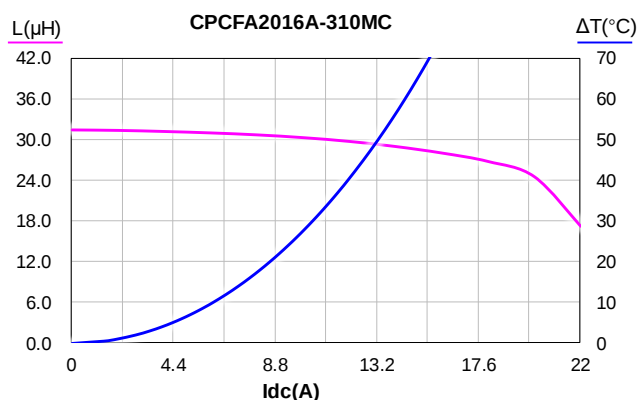
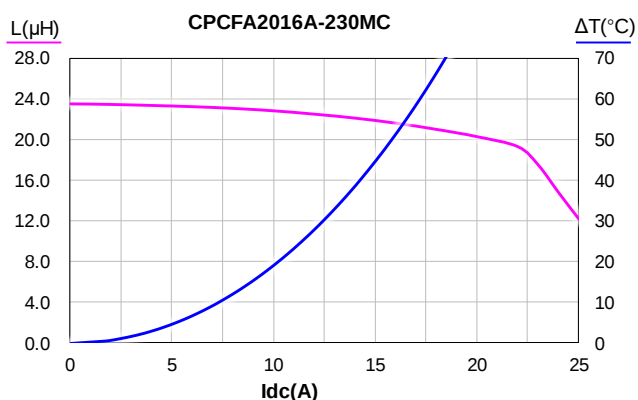
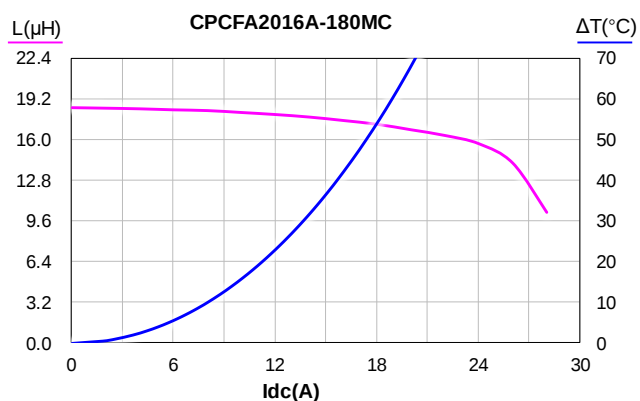
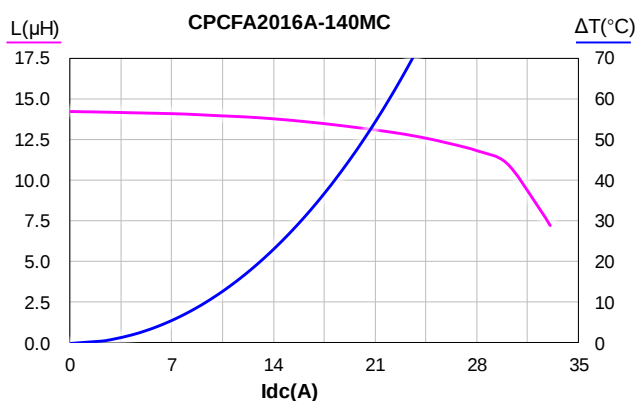






5 Inductance vs Frequency Curve

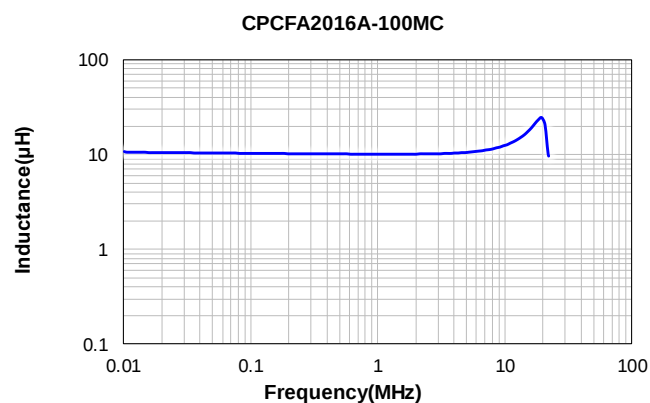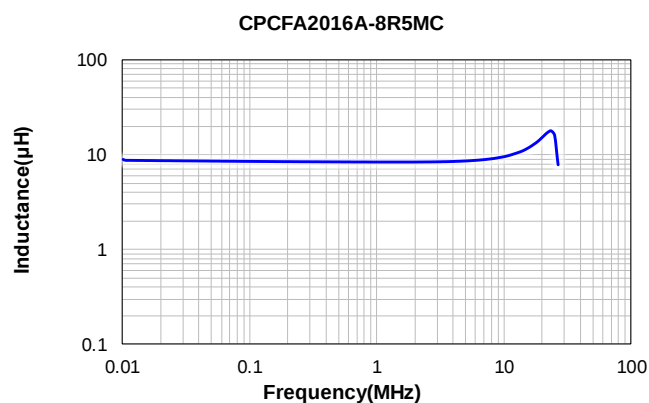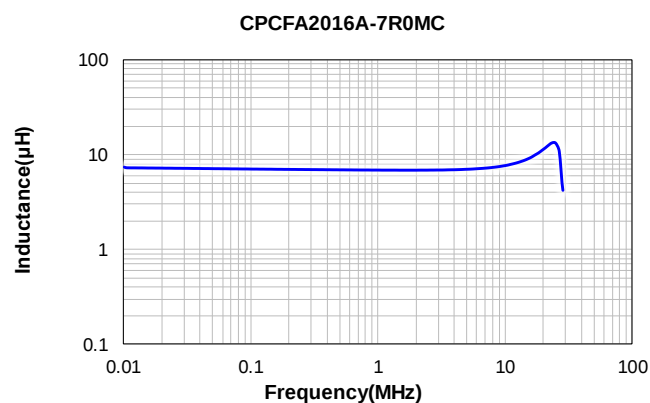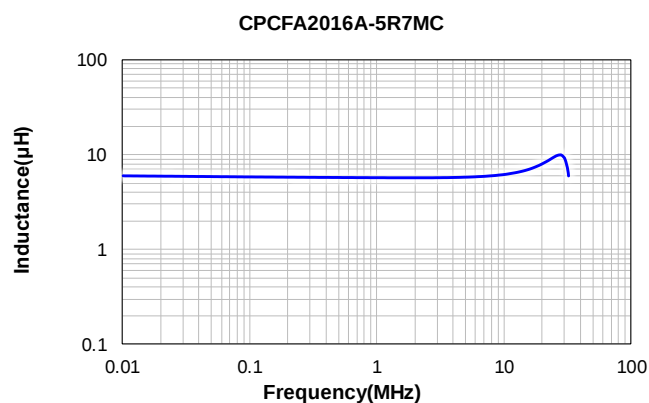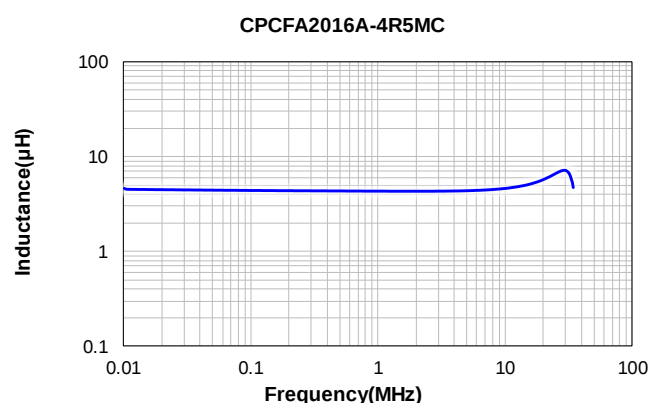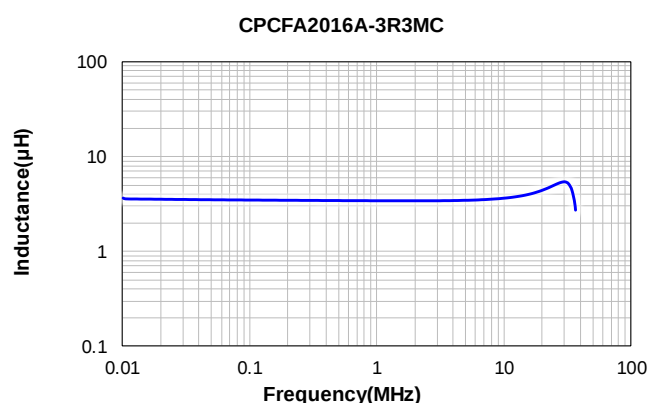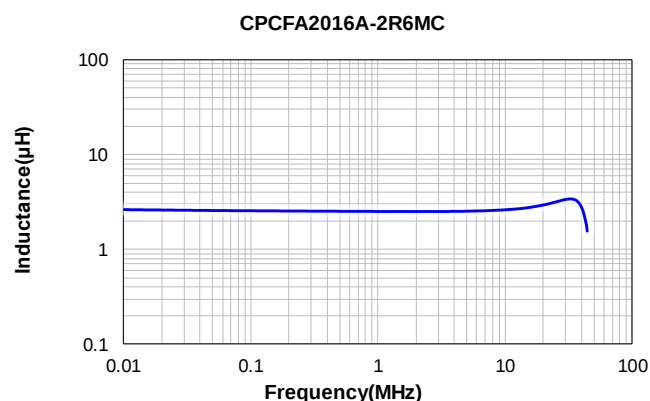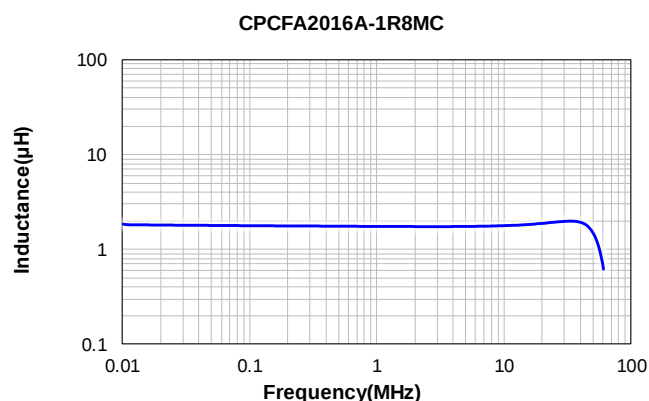

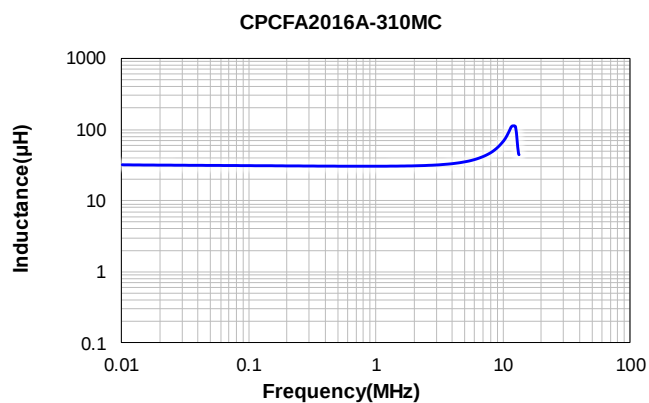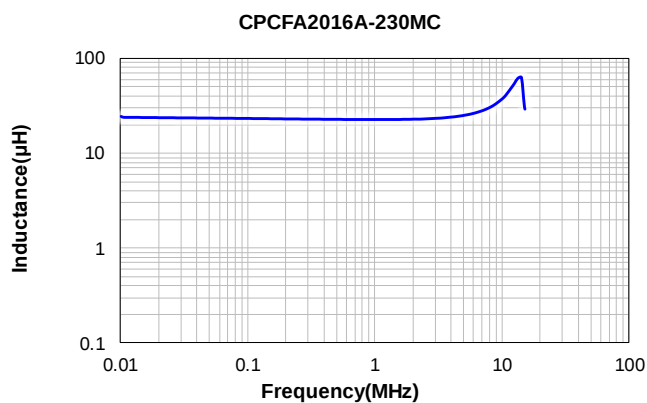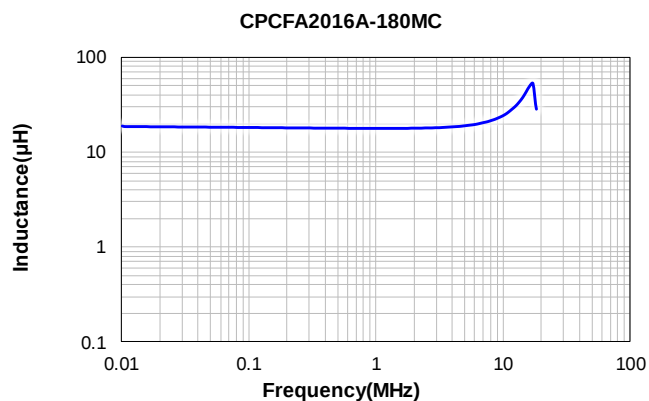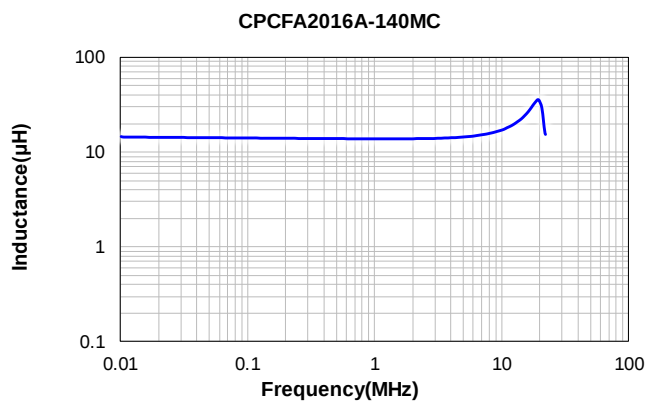


6 Impedance vs Frequency Curve

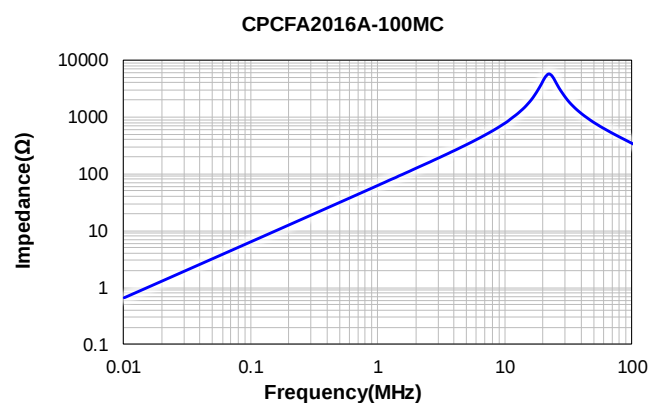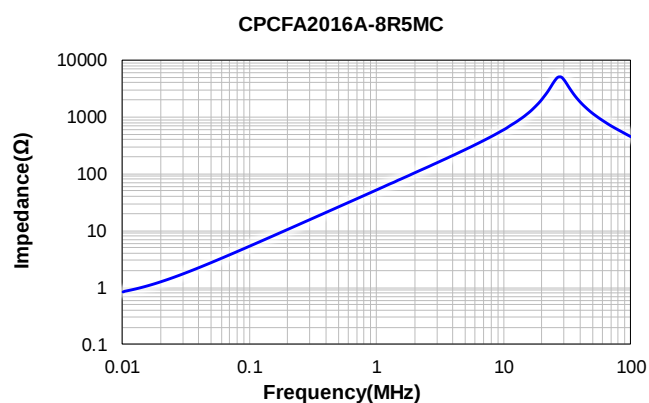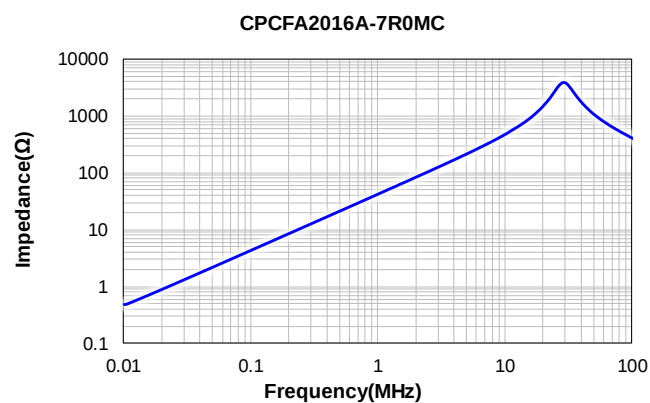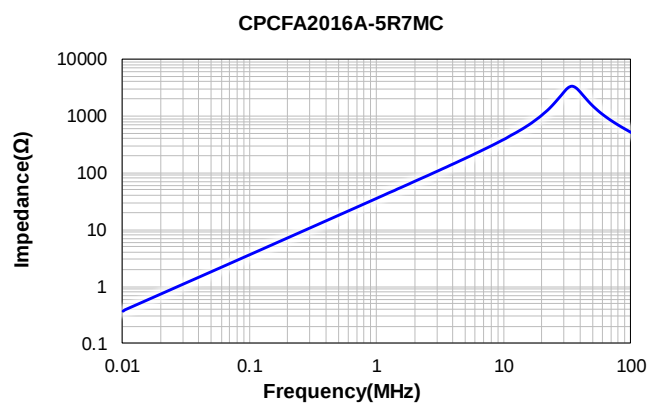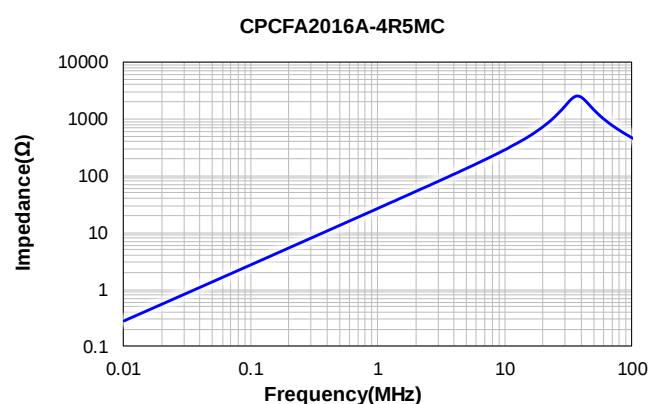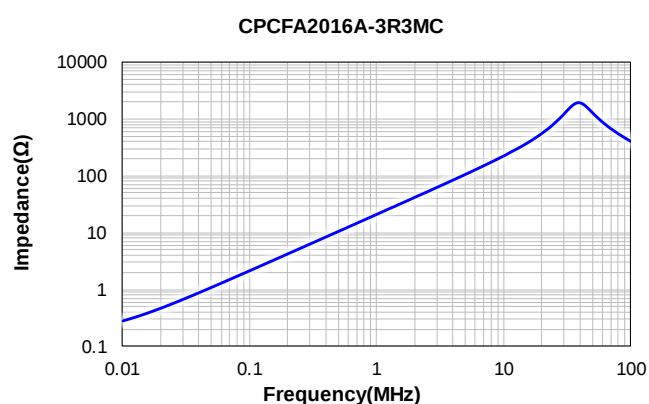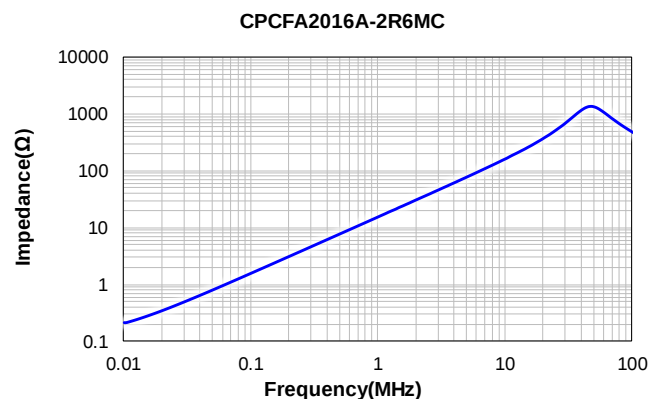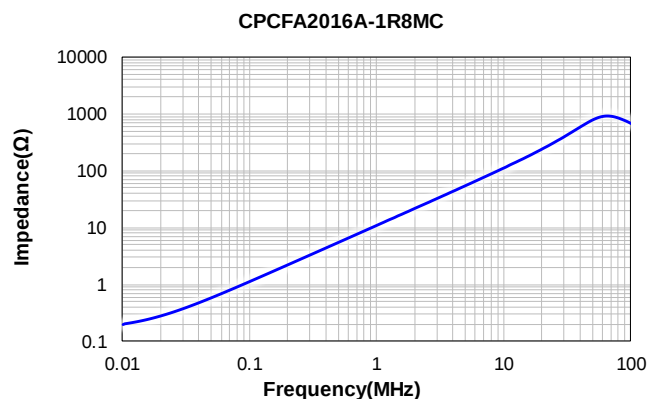

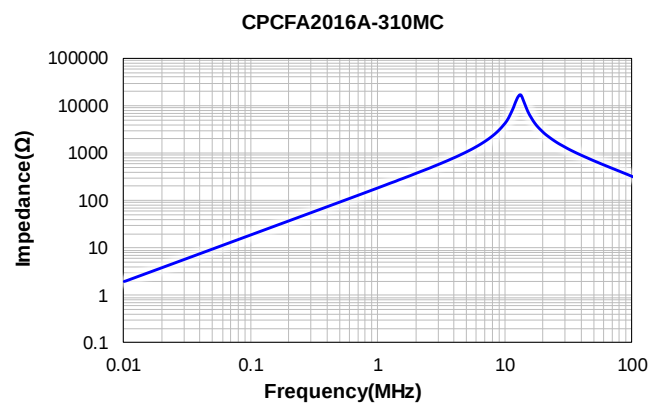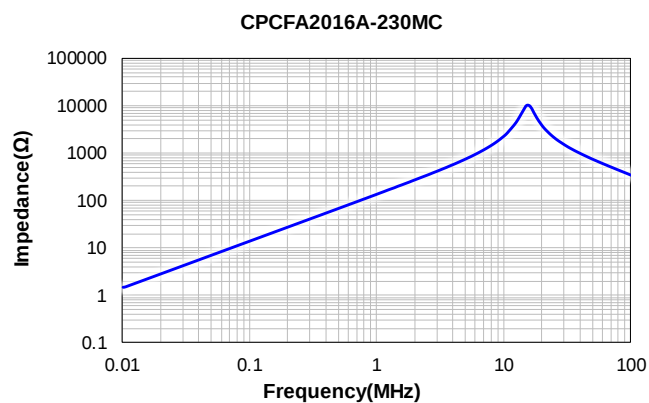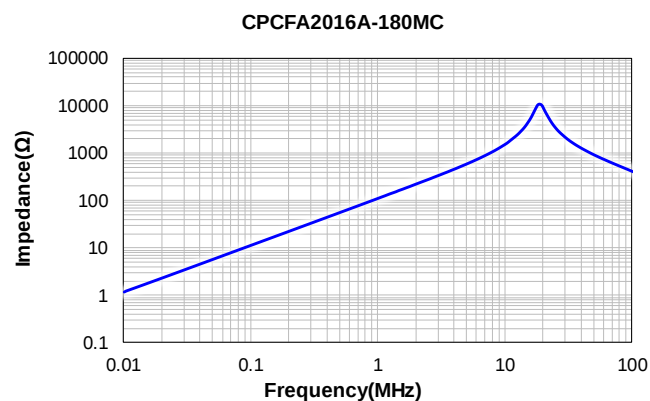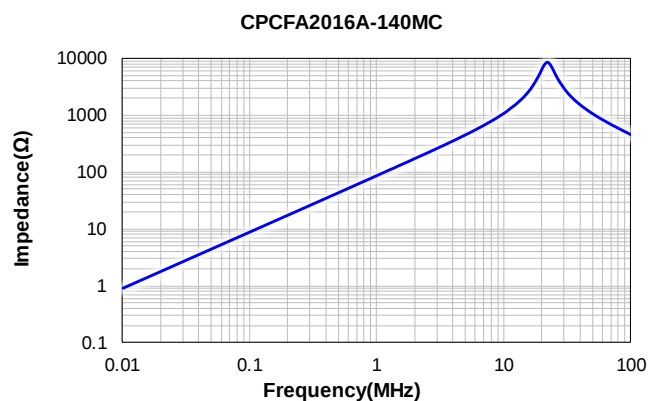

7 Packing Specification


7.1 Plastic Tray Dimensions (mm)

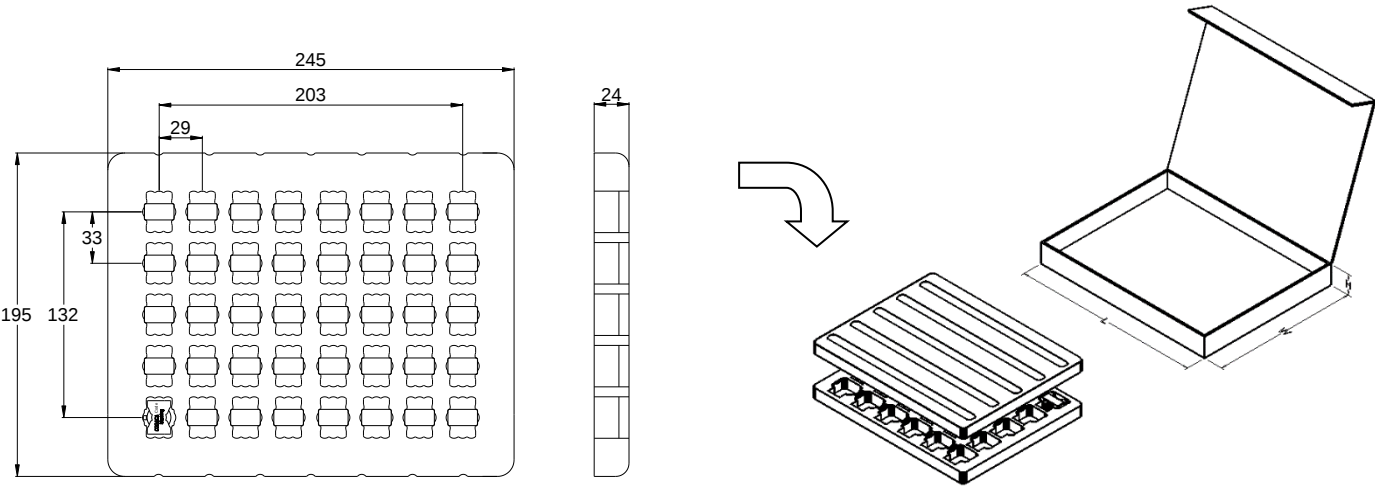

Packaging Unit (Pcs)	Material
40	APET

L typ	W typ	H typ	No. of Tray (Pcs)	Packaging Unit(Pcs)	Material
265	205	30	1	40	Paper

7.2 Packing(mm)

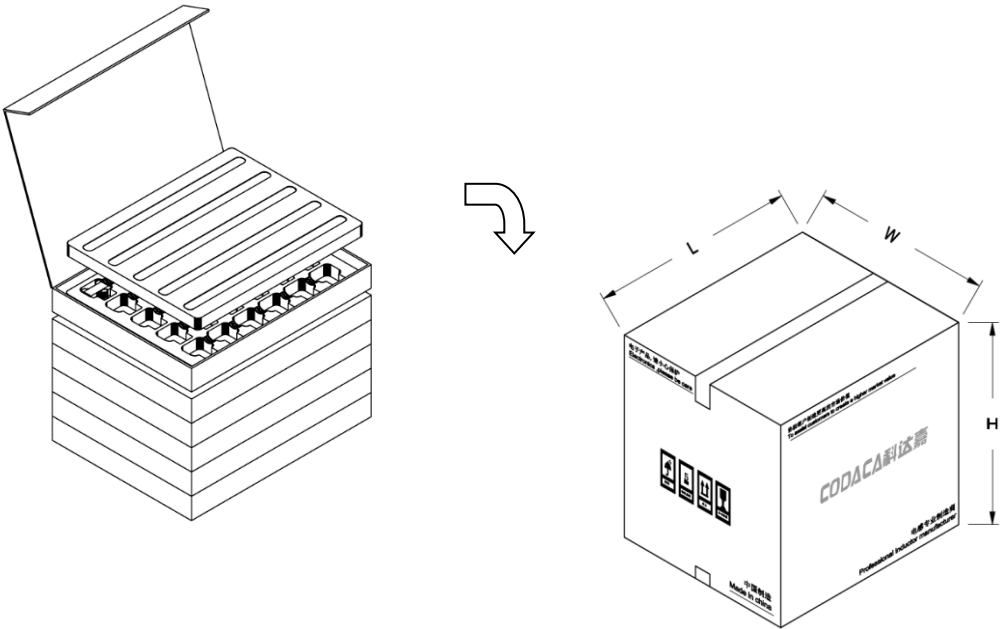

L typ	W typ	H typ	No. of Inner Carton(Pcs)	Packaging Unit(Pcs)	Material
275	232	261	8	320	Paper

8 Notice of Use

- 8.1 Special reminder: circuit design, component placement, PCB size and thickness, cooling system, etc., all will affect the product temperature. Please verify the product temperature in the final application.
- 8.2 Product in packing storage condition: temperature 5~40°C, RH≤70%.
If taken out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminal (electrodes), affecting soldering status.
- 8.3 A storage of Codaca electronic products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- 8.4 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust, or corrosion.
- 8.5 Always handle products with care.
- 8.6 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering.
Always ensure optimum conditions for soldering.
- 8.7 When this product will be used on a similar or new project to the original one, sometimes it might be unable to satisfy the specifications due to different conditions of usage.
- 8.8 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., in abnormal conditions protective devices or protection circuit in the end product.
- 8.9 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.
- 8.10 If used in potting compound, the magnet wire coating might be damaged, please consult with us.
- 8.11 Refrain from rinsing product. If necessary, please consult with us.
- *8.12 Codaca electronic products without "V" prefix are qualified for industrial product requirements, and with "V" prefix are qualified for AEC-Q200, but it doesn't mean that Codaca electronic products can absolutely meet specific industry norms and quality test standards in automotive electronics or more strict application fields. Codaca electronic will be exempted from being responsible for the consequences of using Codaca products in automotive electronics or higher application fields related to safety when without being aware of it.