

Outline:

- 6.6 x 4.2mm Typ.(L x W), 2.7mm Typ.Height
- Carrier tape packing, suitable for SMT process
- Low DCR and excellent current handling
- In addition to the standard versions of inductors shown here custom inductors are available to meet your exact requirements

Features:

- Core material: Ferrite
- Core and winding loss:
- Environmental: RoHS, Reach compliant, Halogen free
- Weight: 0.16g
- Moisture Sensitivity: Level (MSL) 1
(unlimited floor life at <30°C / 85% relative humidity).
- Operating temperature range: -40°C ~ +125°C
(including coil's self temperature rise)
- Storage temperature range: -40°C ~ +125°C


Application:

- Ideally used in Notebook PC, LCD T, Game machine STB
- buck converter, network communication equipment, and etc

1 Electrical Characteristics

Part No.	Inductance (μ H)※1 $\pm 20\%$	D.C.R. (m Ω)		Isat (A)※2 Typical	Irms (A) ※3 Typical
		Typical	Max.		
SPF1608-1R0M	1.00	20.7	24.8	4.00	3.43
SPF1608-2R0M	2.00	30.6	36.7	2.70	2.82
SPF1608-3R3M	3.30	46.0	55.2	2.10	2.30
SPF1608-4R7M	4.70	61.9	74.3	1.80	1.98
SPF1608-6R8M	6.80	91.0	109	1.50	1.63
SPF1608-8R2M	8.20	111	133	1.30	1.48
SPF1608-100M	10.0	145	174	1.20	1.30
SPF1608-120M	12.0	165	198	1.10	1.21
SPF1608-150M	15.0	191	229	1.00	1.13
SPF1608-180M	18.0	220	264	0.90	1.05
SPF1608-220M	22.0	254	305	0.80	0.98
SPF1608-270M	27.0	325	390	0.72	0.87
SPF1608-330M	33.0	444	533	0.65	0.74
SPF1608-390M	39.0	485	582	0.60	0.71
SPF1608-470M	47.0	560	672	0.55	0.66
SPF1608-560M	56.0	690	828	0.50	0.59
SPF1608-680M	68.0	830	996	0.45	0.54
SPF1608-820M	82.0	1,066	1,279	0.42	0.48
SPF1608-101M	100	1,190	1,428	0.38	0.45
SPF1608-121M	120	1,340	1,608	0.32	0.43
SPF1608-151M	150	1,750	2,100	0.30	0.37
SPF1608-181M	180	2,020	2,424	0.28	0.35
SPF1608-221M	220	2,600	3,120	0.26	0.31
SPF1608-271M	270	3,140	3,768	0.23	0.28
SPF1608-331M	330	3,600	4,320	0.21	0.26
SPF1608-391M	390	4,810	5,772	0.19	0.22
SPF1608-471M	470	5,450	6,540	0.18	0.21
SPF1608-561M	560	6,250	7,500	0.16	0.20
SPF1608-681M	680	8,000	9,600	0.15	0.17
SPF1608-821M	820	9,300	11,160	0.14	0.16
SPF1608-102M	1,000	11,070	13,284	0.12	0.15





















2 Product Dimensions (mm)











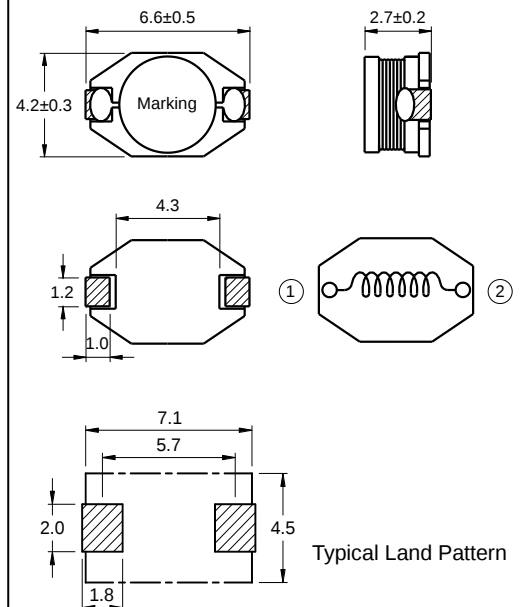


All data is tested on 25°C ambient temperature











- Inductance measure condition at 1.00kHz, 0.25V
- Isat: the actual value of DC current when the Inductance decrease 20% of its initial value
- Irms: the actual value of DC current when the the temperature rise is $\Delta T 40^\circ\text{C}$ ($T_a = 25^\circ\text{C}$)











3 Saturation Current vs Temperature Rise Current Curve
















4 L vs Frequency

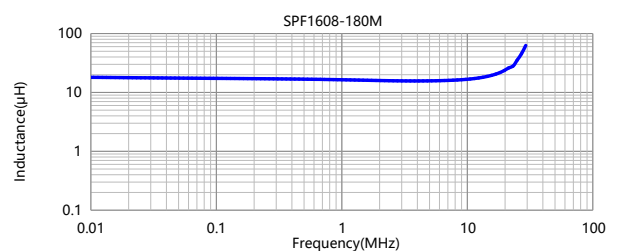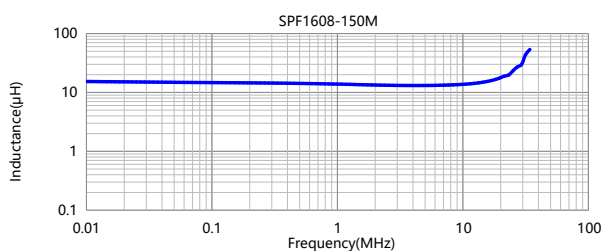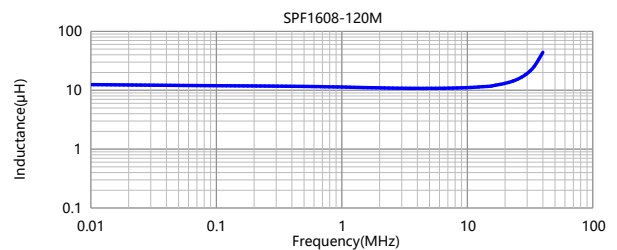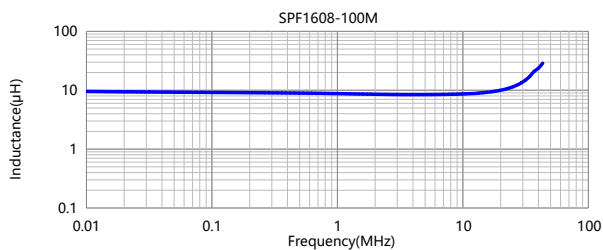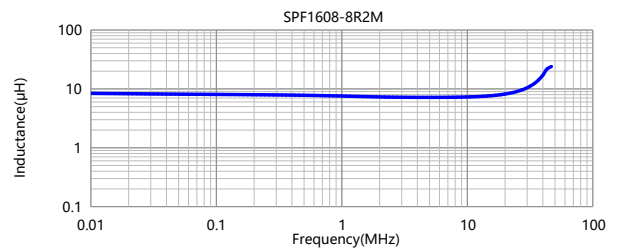
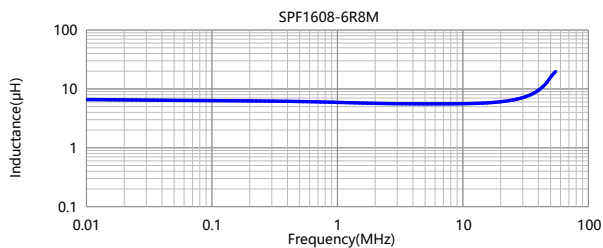
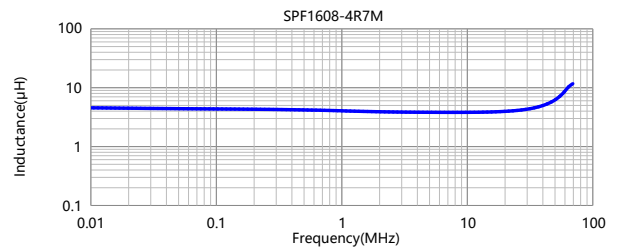
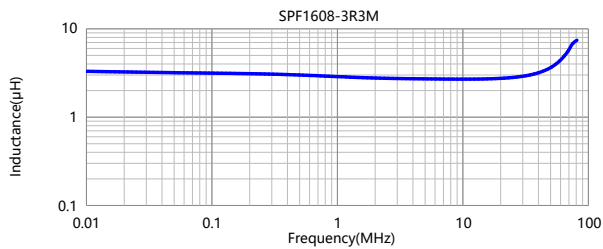
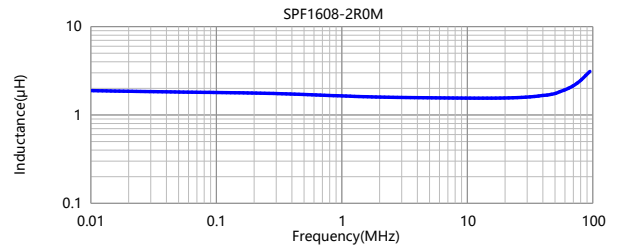
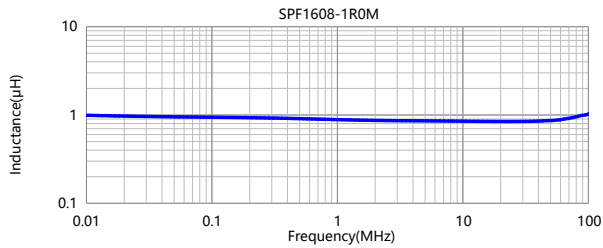


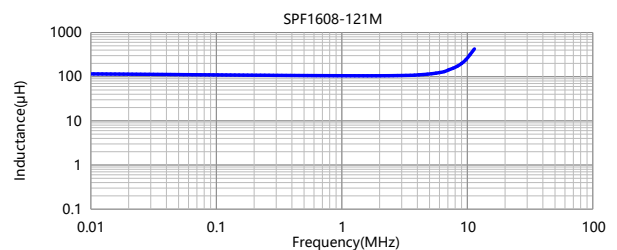
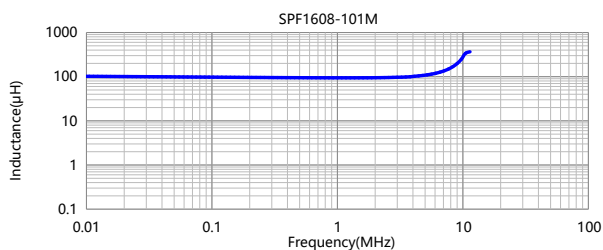
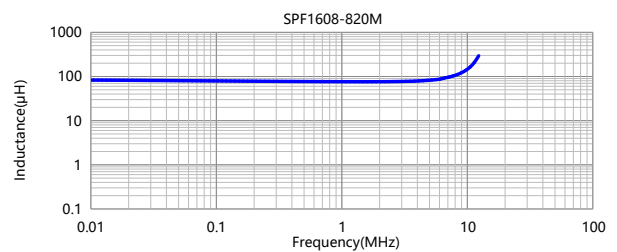
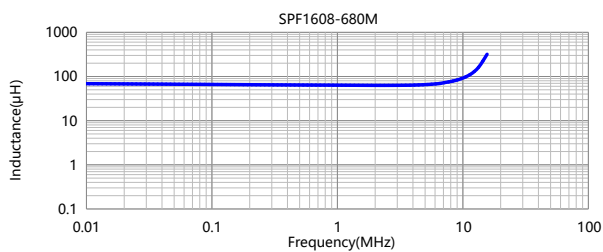
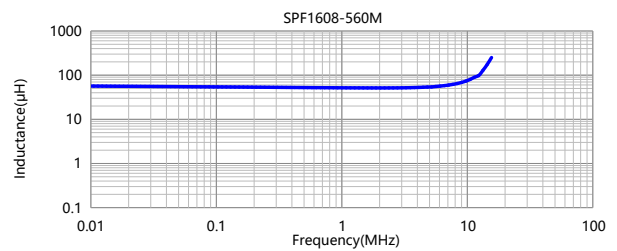
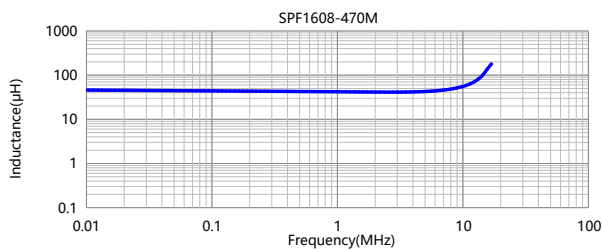
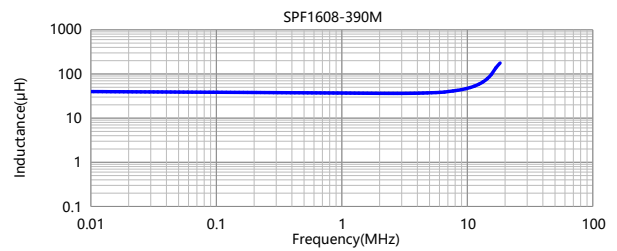
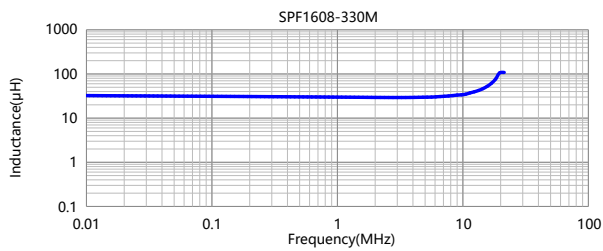
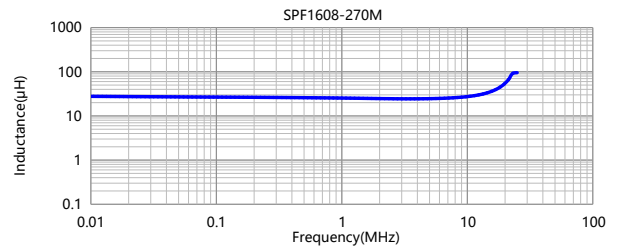
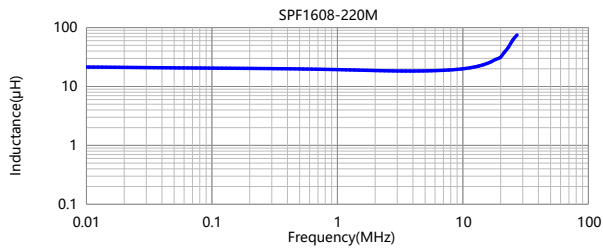


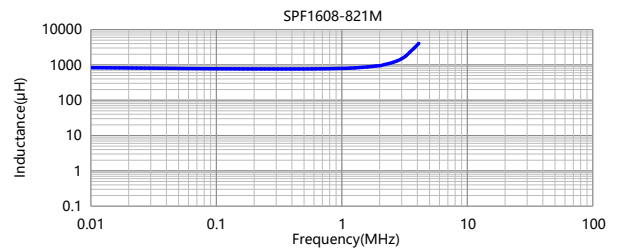
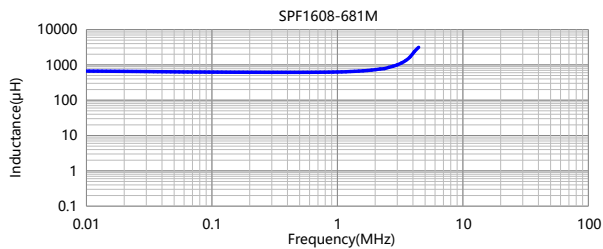
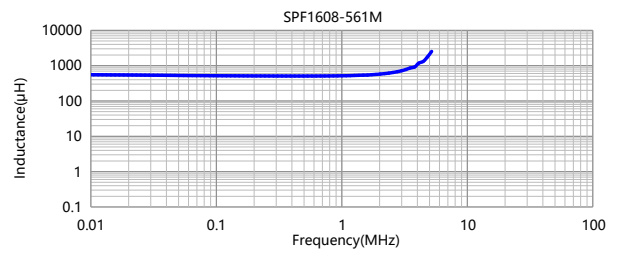
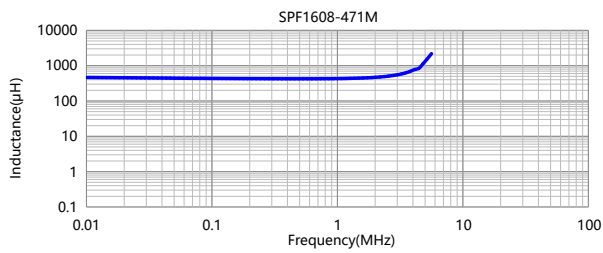
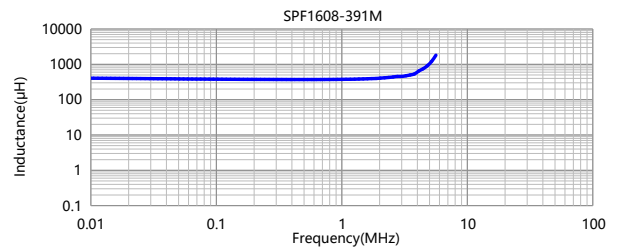
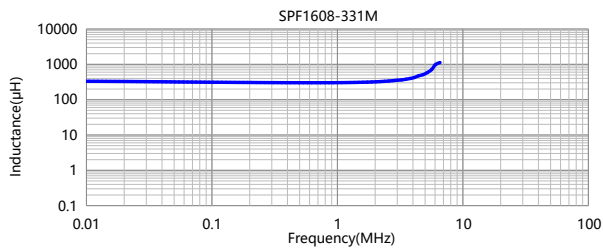
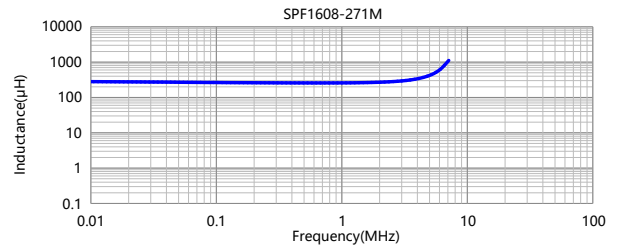
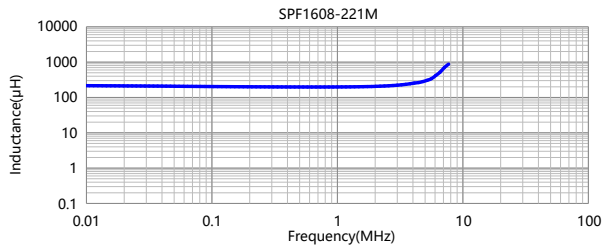
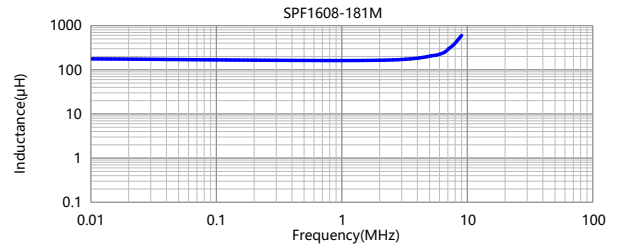
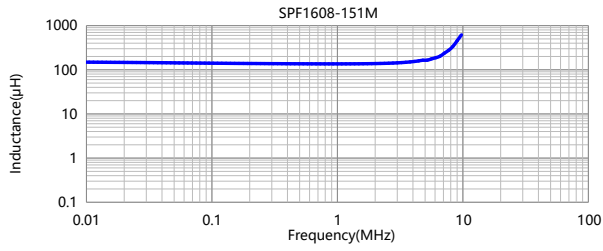






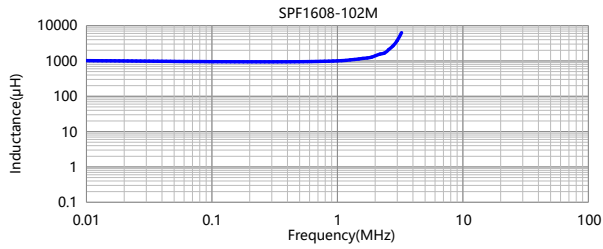


5 Impedance vs Frequency

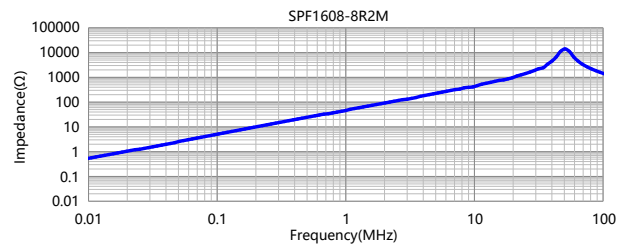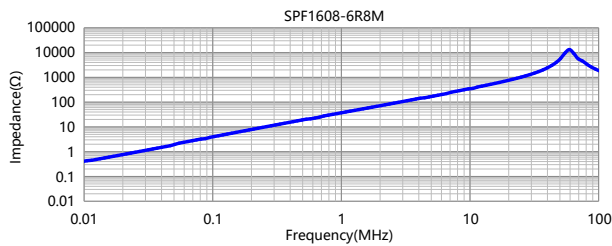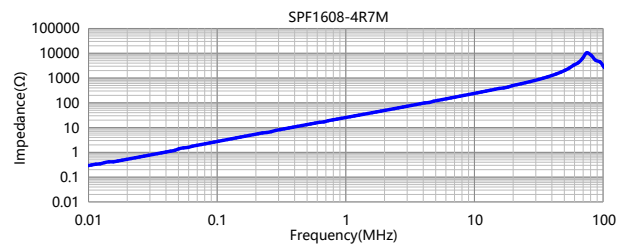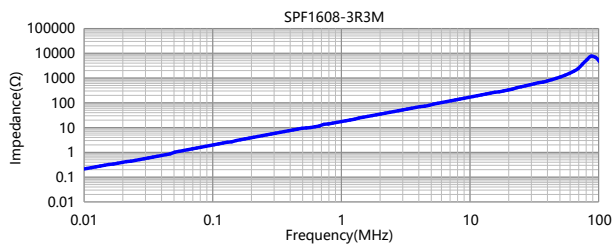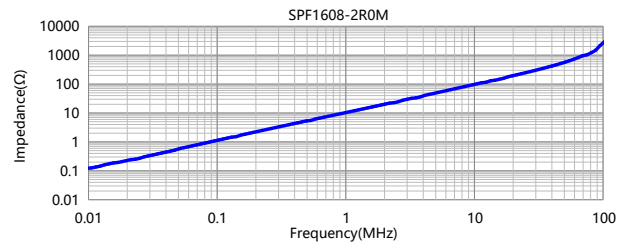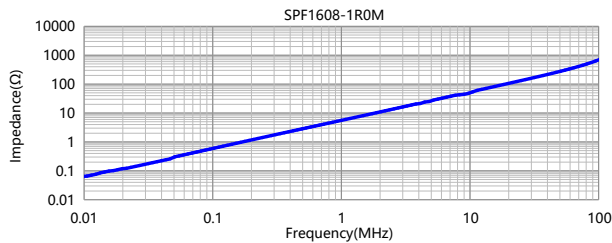

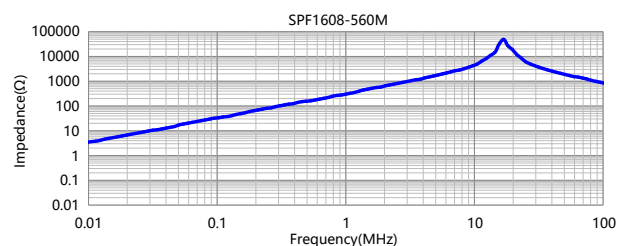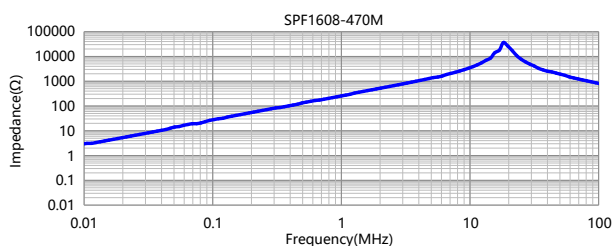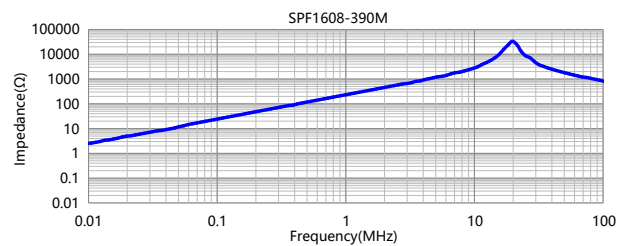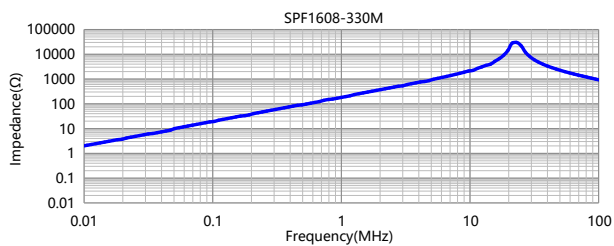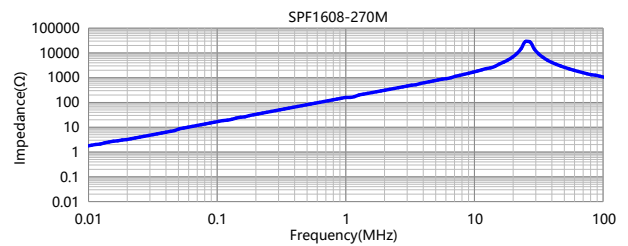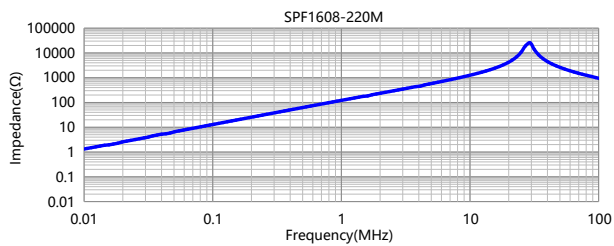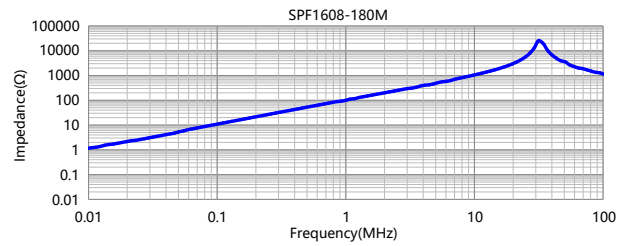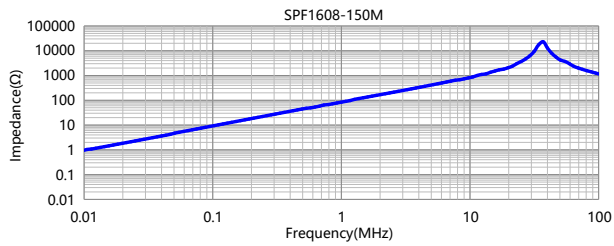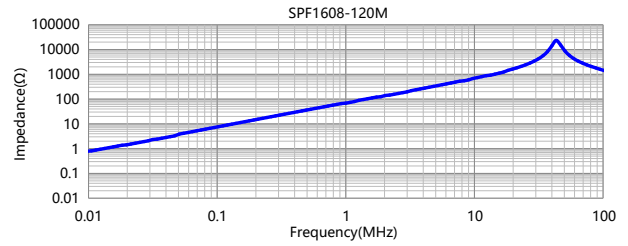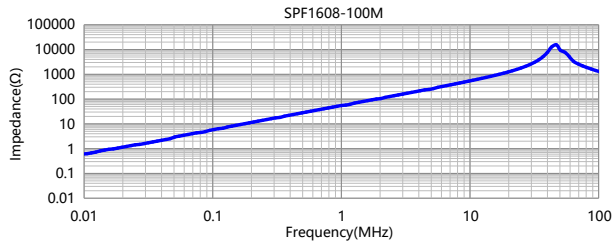

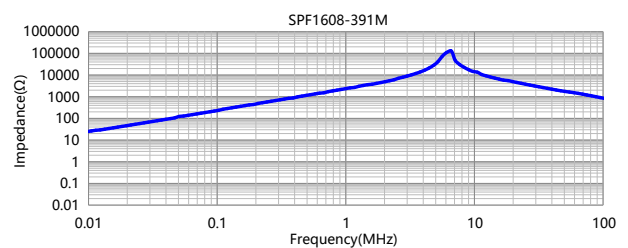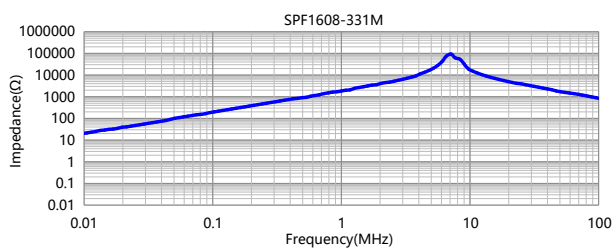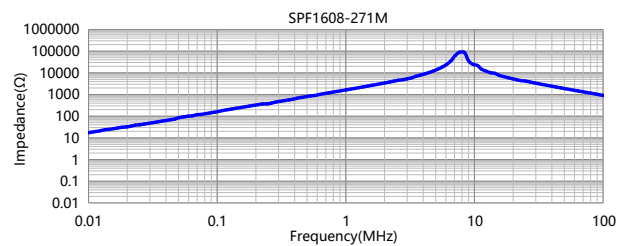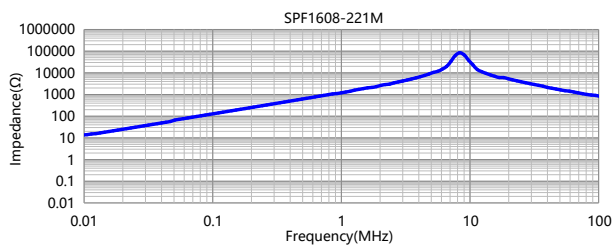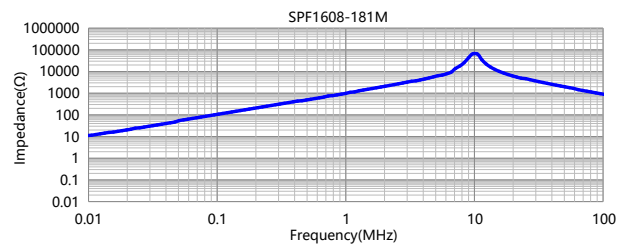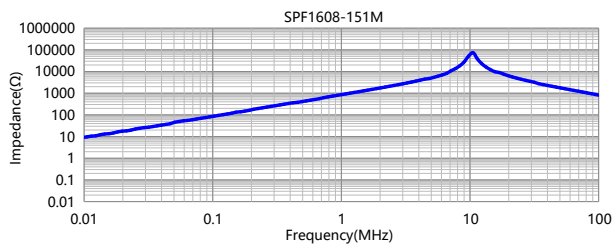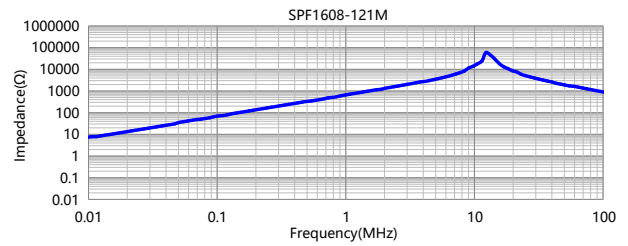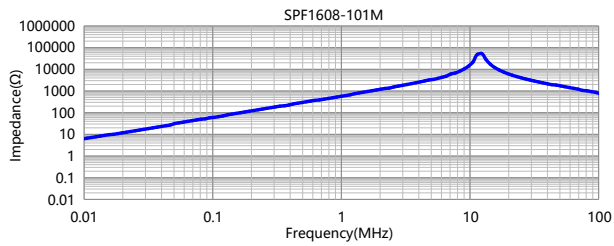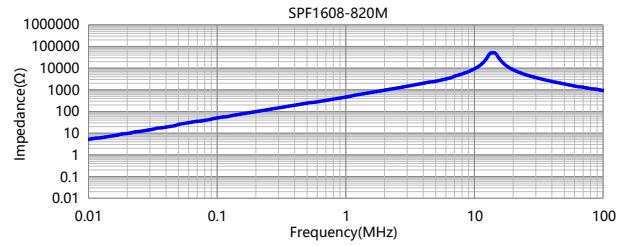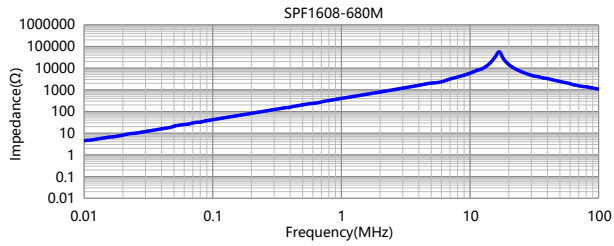

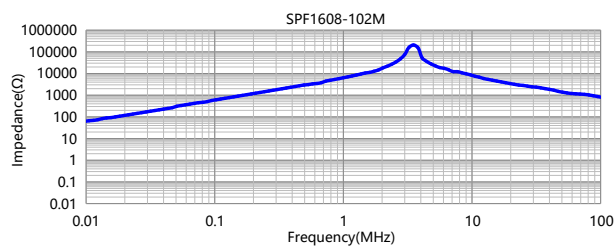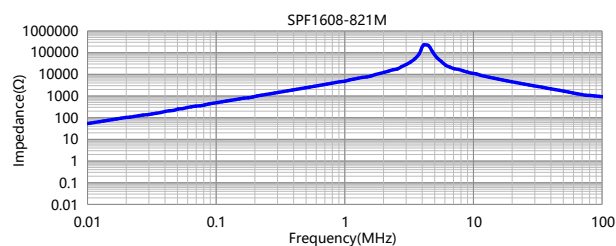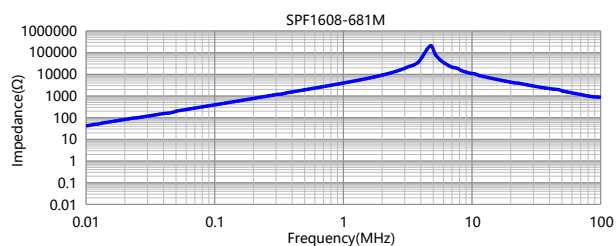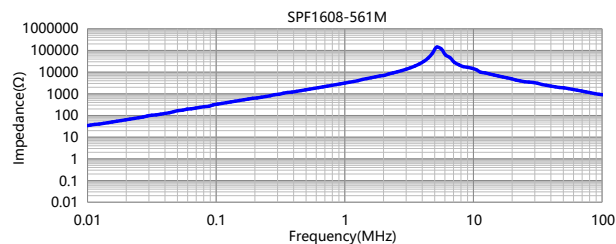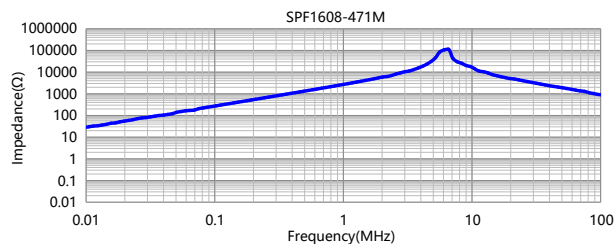

6.1 Carrier Tape Dimensions (mm)



Figure 1: Dimensions and Cover Tape Peeling Condition

The figure illustrates the dimensions and cover tape peeling condition for the wafer.

Dimensions:

- Top view dimensions: 13.0 ± 0.5 , 21.0 ± 0.8 , 2.0 ± 0.5
- Side view dimensions: $W2$, $W1$, $16.4^{+2.0}_{-0}$, 330 ± 2.0 , 100 Min. , 15.90 Min. , $W3$

Cover tape peeling condition:


- Cover tape peeling force shall be 0.1 to 1.3 N .
- Reference peeling speed $300 \pm 10 \text{ mm/min}$.
- Peeling angle: $165^\circ \sim 180^\circ$
- Unreeling direction
- Pull direction
- Carrier tape

■ Inner Carton: 365×345×105mm ■ Out Carton : 385×365×245mm

Product Series	Quantity / Reel	Inner Carton Quantity	Out Carton Quantity
SPF1608	2000pcs	$(2000 \times 4) = 8000\text{pcs}$	$(8000 \times 2) = 16000\text{pcs}$

7 Soldering Specification

7.1 Reflow Profile for SMT Components

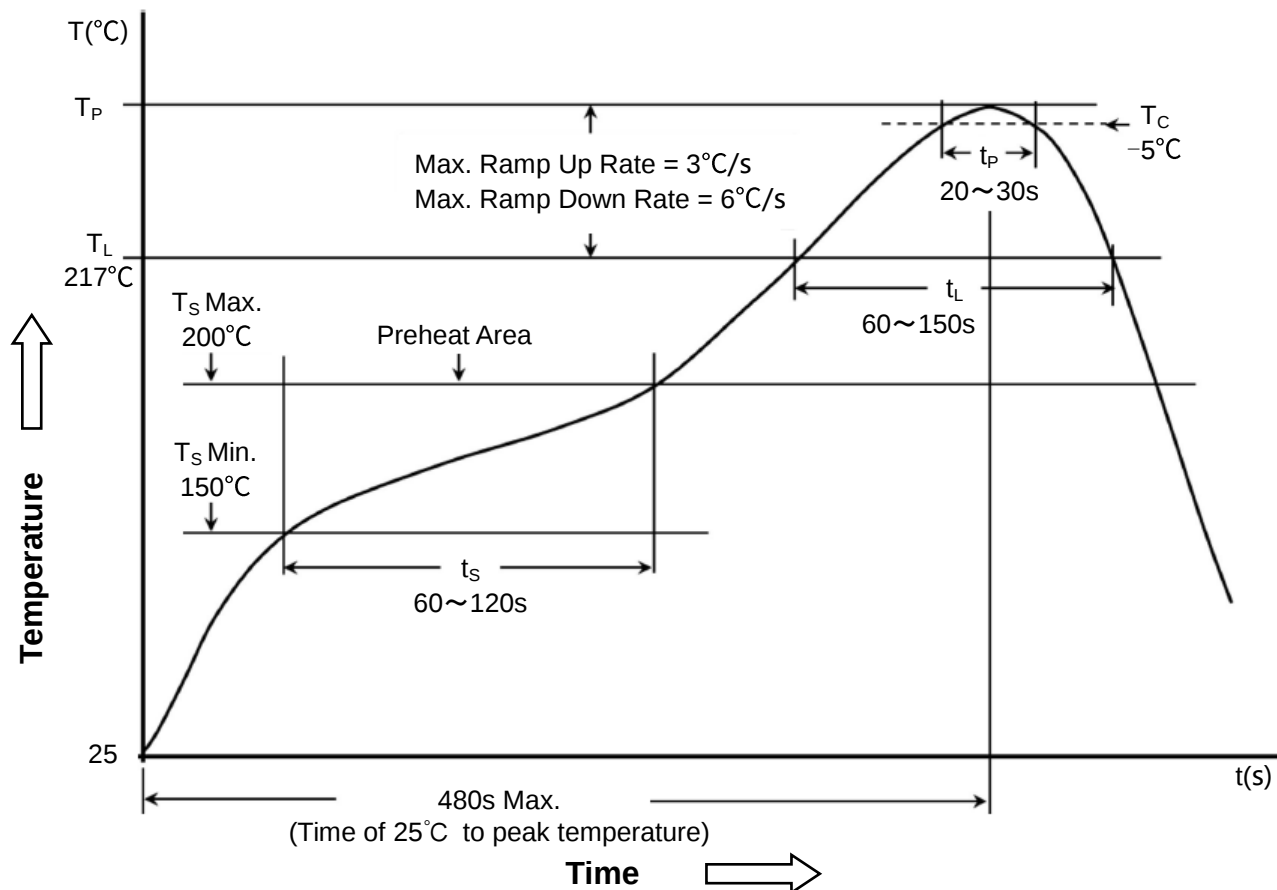

7.2 Classification of Peak Package Body Temperature (T_{P})

	Package Thickness	Package Volume		
		$<350 \text{ mm}^3$	$350 \sim 2000 \text{ mm}^3$	$>2000 \text{ mm}^3$
PB-Free Assembly	$<1.6\text{mm}$	260°C	260°C	260°C
	$1.6 \sim 2.5\text{mm}$	260°C	250°C	245°C
	$\geq 2.5\text{mm}$	250°C	245°C	245°C

※ Reflow is referred to standard IPC/JEDEC J-STD-020E.

8 Notice of Use

- 8.1 Special remind: Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.
- 8.2 Product in packing storage condition: temperature 5~40°C, RH≤70%.
If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminals (electrodes), affecting soldering status.
- 8.3 A storage of Codaca Electronic products for longer than 12 months is not recommended, Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- 8.4 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust or corrosion.
- 8.5 Always handle products with care.
- 8.6 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering.
Always ensure optimum conditions for soldering.
- 8.7 When this product will be used on a similar or new project to the original one,
sometimes it might be unable to satisfy the specifications due to different condition of usage.
- 8.8 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., or use in abnormal conditions protective devices or protection circuit in the end product.
- 8.9 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.
- 8.10 If using in potting compound, the magnet wire coating might be damaged, please consult with us.
- 8.11 Refrain from rinsing coils. If necessary, please consult with us.
- *8.12 Codaca Electronic products without "V" prefix are qualified for industrial product requirement, and with "V" prefix are qualified for AEC-Q200, but it doesn't mean that Codaca Electronic products can absolutely meet specific industry norms and quality test standards in automotive electronics or more strict application fields. Codaca Electronic will be exempted from being responsible for the consequences of using Codaca products in automotive electronic or higher application field related to safety when without being aware of it.